

TECHNICAL DATA


ESTRAD SAFETY R11/50+

PRODUCT







Estrad Safety R11/50+	Safety floor, wet room
Application	EN 685 / ISO 10874
	23/34/43



SPECIFICATION

Thickness		EN 428 / EN ISO 24346	2.0 mm (~0.08")
Weight		EN 430 / EN ISO 23997	2700 g/m ² (0.55 lbs/sq ft)
Roll length		EN 426 / EN ISO 24341	20 m (65.62')
Width		EN 426 / EN ISO 24341	2 m (6'6")

PRODUCT PROPERTIES

PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore
General performance	EN 13845 ASTM F1303	Conforms Conforms
Fire resistance	 EN 13501-1 ASTM E648 AUSTRALIAN BCA SPEC C1.10-3	B _{fl} -s1 Class 1 Complies
Slip resistance	 EN 13845 AS 4586 Appendix A AS 4586 Appendix C AS 4586 Appendix D DIN 51097 DIN 51130 RRL Pendulum Test Surface Roughness	ESb & ESf P4 Class B R11 Class B R11 ≥ 50 (wet test - 4S Rubber/Slider 96) Rz ≥ 20 μm
Electrical propensity	 EN 1815	≤ 2 kV (antistatic)
Wear and scratch resistance	 EN 13845 EN 649	50,000 cycles Group T
Resistance to chemicals	 EN 423	Good chemical resistance
Water tightness	 EN 13553 Annex A	Watertight




COLLECTIONS COLOURS
ESTRAD SAFETY R11/50+




7746




7747

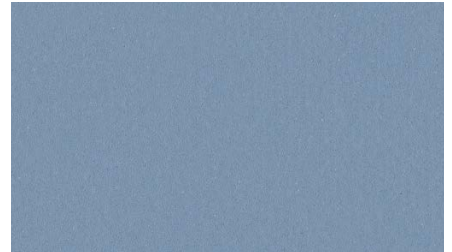


7748

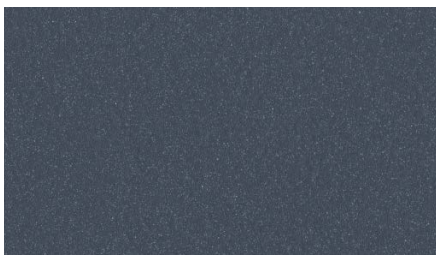

7749

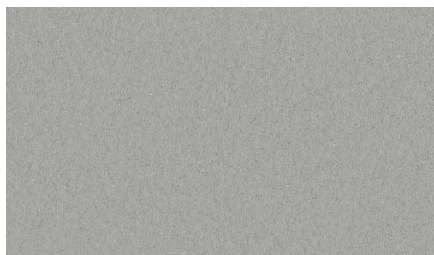

7750

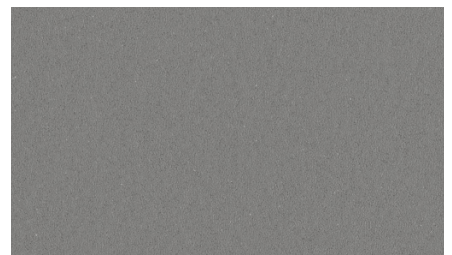

7751