



MÖRE

A rustic product with a scraped, flowing surface that high enhances the structure in an natural way. The cold greys appear to have been worn down, revealing a warmer base.


PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	151NCSEK03KW240	Wood Species	Oak	Moisture	EN13183	7%±2%
EAN Code	7393969038980	Design	1-strip	content		
Surface Treatment	Oil This floor should be oiled immediately after installation.	Grading	Dynamic	Minimun Mean Density kg/m ³		>500 kg/m ³
		Range	Kährs Supreme	Reaction To Fire	EN13501-1	Dfl-s1
		Collection	Småland Collection	Formaldehyde Emission	EN717-1	E1
Refining Treatment	Bevelled 4-sided,	Natural/Stained	Stained			
	Brushed, Handscraped	Brinell Value	3,7	Content PCP	CEN/TR14823	≤ 5 x 10-6n
Dimensions	187 x 2420 mm	loint	Woodloc® 5S	Breaking EN Strength N/mm²	EN1533	NPD
Weight per Package	22 kg	Floor heating	Yes			
Area per Package	2.7 m ²					
Area per pallet	122.4 m ²	Wear-layer material	Hardwood	Thermal Conductivity	EN12664	0,14 W/mK
DI !f-	D1	Wear Layer Thickness	3.5 mm	Conductivity		
Package info	Packages may contain start and stop boards.	Core material	Pine/Spruce lamella	Thermal Resistance R-Value		.11 (m2K/W)
		Backside material	Veneer	Biological Durability	EN350-2	Class 1
DETAIL DESCRIPTION			15 mm			C!:
allowed, from light to dark brown. Sapwood may		Installation method	Floating, Glue-down	CARB2 Slipperiness CEN/TS15676		Compliant
		Surface Colour	Earth Grey			

COLOUR CHANGE

present in all sizes and numbers.

Stained product - noticable color change over time.

Other products in this collection

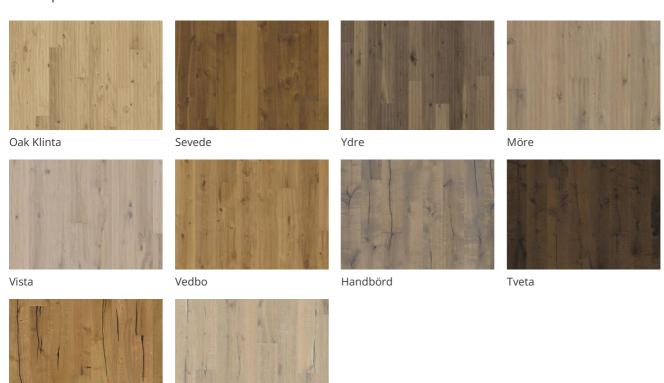

CERTIFICATES

Finnveden









Aspeland

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.