



< 2 kV (antistatic)

Suitable

Good

Pass with good results

TRIGLAV DRY BACK 0.55 MM

Our Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to elegant herringbone and rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.7 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Vinyl Plank floors, they are phthalate-free.

TECHNICAL PROPERTIES

EN 1815

EN 425

EN ISO 26987

Statical electrical

Chemical resistance

Effect of castor chair

Resistance to bacteria and


propensity

fungi

PRODUCT DETAILS		
Product type / Construction	Vinyl Flooring / Dry Back LVT	
Article Number / EAN Code	LTDBW2117-229-5 / 7393969113656	
Design	1-strip	
Width x Length x Thickness	9 x 48 x 1/8"	
Weight per package / per	35.3 lbs / 8.8 lbs	
m2		
Area per package / per	42 sqft / 2854.6 sqft	
pallet		
Installation method	Glue-Down	
Floor heating	Yes	
Wear leayer thickness	0"	
TECHNICAL PROPERTIES		
Reaction To Fire	EN13501-1	Bfl-s1
Thermal Resistance R-Value		0.011 (m2K/W)
Dimensional stability	EN ISO 23999	< 0.1 %
Colour fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893	DS (>0.3)
Slip resistance	DIN 51130	R10

Other products in this collection



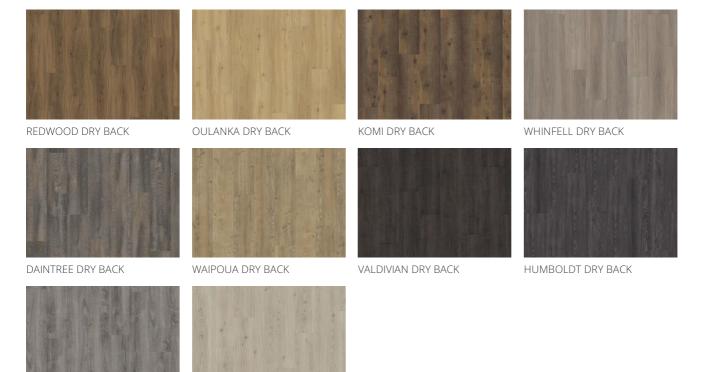

PLITVICE DRY BACK

TRIGLAV DRY BACK