



< 2 kV (antistatic)

Suitable

Good

Pass with good results

HUMBOLDT DRY BACK 0.55 MM

Our Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to elegant herringbone and rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.7 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Vinyl Plank floors, they are phthalate-free.

EN 1815


EN 425

EN ISO 26987

| PRODUCT DETAILS | | | TECHNICAL PROPERTIES |
|-----------------------------|---------------------------------|---------------|----------------------------|
| Product type / Construction | Vinyl Flooring / Dry Back LVT | | Statical electrical |
| Article Number / EAN Code | LTDBW2125-229-5 / 7393969113717 | | propensity |
| Design | 1-strip | | Chemical resistance |
| Width x Length x Thickness | 9 x 48 x 1/8" | | Effect of castor chair |
| Weight per package / per | 35.3 lbs / 8.8 lbs | | Resistance to bacteria and |
| m2 | | | fungi |
| Area per package / per | 42 sqft / 2854.6 sqft | | |
| pallet | | | |
| Installation method | Glue-Down | | |
| Floor heating | Yes | | |
| Wear leayer thickness | 0" | | |
| TECHNICAL PROPERTIES | | | |
| Reaction To Fire | EN13501-1 | Bfl-s1 | |
| Thermal Resistance R-Value | | 0.011 (m2K/W) | |
| Dimensional stability | EN ISO 23999 | < 0.1 % | |
| Colour fastness | EN ISO 105-B02 | ≥ 6 | <u> </u> |
| Slip resistance | EN 13893 | DS (>0.3) | |
| Slip resistance | DIN 51130 | R10 | <u> </u> |

Other products in this collection



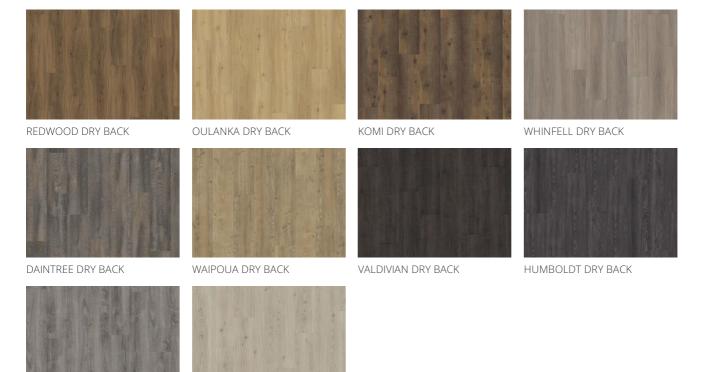

PLITVICE DRY BACK

TRIGLAV DRY BACK