



< 2 kV (antistatic)

Suitable

Good

Pass with good results

SNOWDONIA DRY BACK 0.55 MM

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.55 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS	TECHNICAL PROPERTIES			
Product type / Construction	Luxury Vinyl Tiles and Planks / Dry Back LVT		Statical electrical	
Article Number / EAN Code	LTDBW2127-229-5 / 7393969113724		propensity	
Design	Plank		Chemical resistance	
Width x Length x Thickness	229 x 1219 x 2.5 mm		Effect of castor chair	
Weight per package / per	16 kg / 4 kg		Resistance to bacteria and	
m2			fungi	
Area per package / per	3.9 m² / 265.6 m²		-e/ON C/	
pallet			² M1> ² π 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	floor score
Installation method	Glue-down		FASTAM OHIGH	Constant of Services
Floor heating	Yes		_	
Wear leayer thickness	0.55 mm		_	
TECHNICAL PROPERTIES				
Reaction To Fire	EN13501-1	Bfl-s1	_	
Thermal Resistance R-Value	·	0.011 (m2K/W)	_	
Dimensional stability	EN ISO 23999	< 0.1 %		

EN ISO 105-B02

EN 13893

DIN 51130





EN 1815

EN 425

EN ISO 26987

Descri	ntions	&	lmage	r۱
	peroris	~	agc	٠,

Colour fastness

Slip resistance

Slip resistance

1 (2)


≥ 6

R10

DS (>0.3)

Other products in this collection



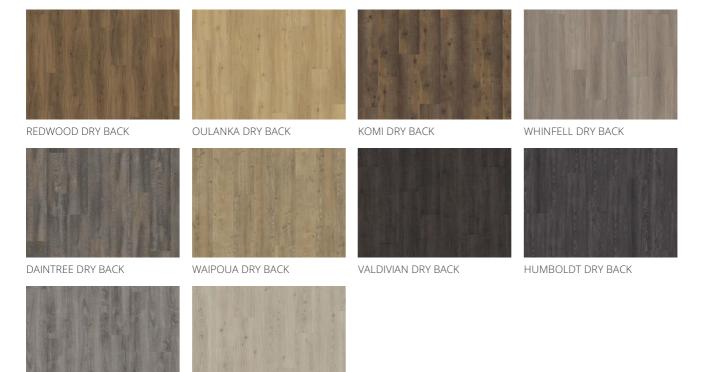

PLITVICE DRY BACK

TRIGLAV DRY BACK