

## GORBEA DBW 229-055 - 0.55 MM


Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.55 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS			TECHNICAL PROPERTIES		
Product type / Construction	Luxury Vinyl Tiles and Planks / Dry Back LVT		Statical electrical	EN 1815	< 2 kV (antistatic)
Article Number / EAN Code	LTDBW2131-229-5 / 7393969113755		propensity		
Design	Plank		Chemical resistance	EN ISO 26987	Pass with good results
Width x Length x Thickness	229 x 1219 x 2.5 mm		Effect of castor chair	EN 425	Suitable
Weight per package / per	16 kg / 4 kg		Resistance to bacteria and		Good
m2			fungi		
Area per package / per	3.9 m <sup>2</sup> / 265.6 m <sup>2</sup>		NON DE CONTRA		
pallet					
Installation method	Glue-down		A BALLYN ONICH		
Floor heating	Yes				
Wear leayer thickness	0.55 mm				
TECHNICAL PROPERTIES					
Reaction To Fire	EN13501-1	Bfl-s1			
Thermal Resistance R-Value		0.011 (m2K/W)			
Dimensional stability	EN ISO 23999	< 0.1 %			
Colour fastness	EN ISO 105-B02	≥ 6			
Slip resistance	EN 13893	DS (>0.3)			
Slip resistance	DIN 51130	R10			

## Descriptions & Imagery

www.kahrs.com | <sup>©</sup>Kährs 2025-08-15

## Other products in this collection

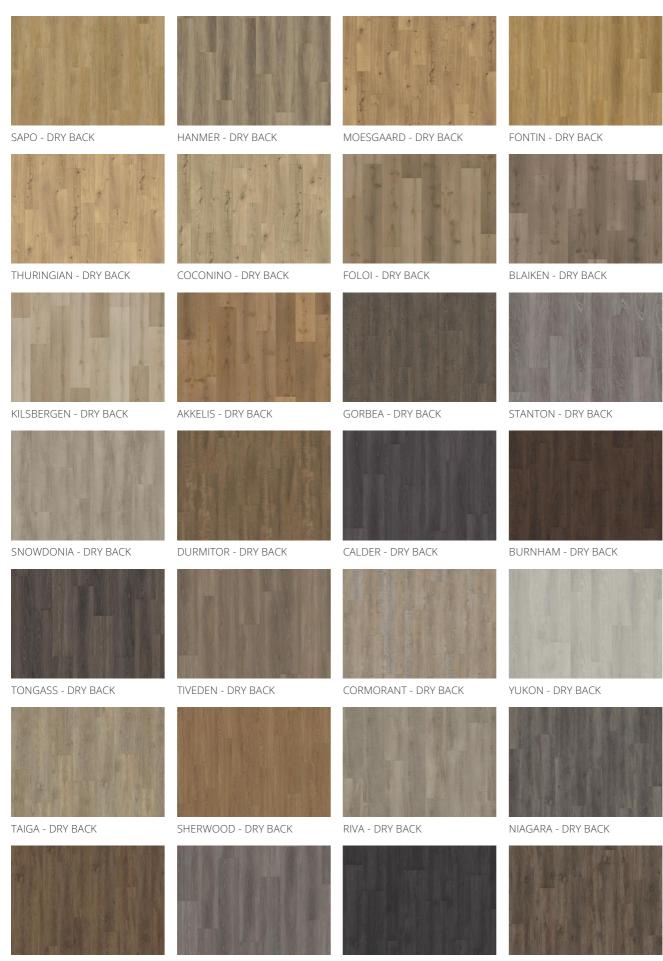

BELLUNO - DRY BACK

WENTWOOD - DRY BACK

SCHWARZWALD - DRY BACK

SAXON - DRY BACK





REDWOOD - DRY BACK

DAINTREE - DRY BACK





KOMI - DRY BACK



VALDIVIAN - DRY BACK



SAREK - DRY BACK



HUMBOLDT - DRY BACK

PLITVICE - DRY BACK



