



GORBEA DBW 229-055 - 0.55 MM

I TDDW/2121 220 F

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.55 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

TECHNICAL PROPERTIES

Resistance to bacteria and fungi

EN112E01 1 Dfl =1

Desetion To Fire

	Article Number	LIDBW2131-229-5	Reaction To Fire	EN 13501-1	BII-S I
	Dimensions	229 x 1219 mm	Thermal Resistance R-V	0.011 (m2K/W)	
	Weight per Package	16 kg	Dimensional stability	EN ISO	< 0.1 %
	Area per Package	4 m²	-	23999	

Construction Dry back Slip resistance EN 13893 DS (>0.3) FACTS Slip resistance DIN 51130 R10 Design Wood design Statical electrical propensity EN 1815 < 2 kV (antistatic)	Area per pallet	265.6 m ²	Colour fastness	EN ISO 105- B02	≥ 6	
Design Wood design Statical electrical EN 1815 < 2 kV (antistatic)	Construction	Dry back	Slip resistance		DS (>0.3)	25
Range Luxury Tiles Propensity Collection Dry Back Wood Collection Chemical resistance EN ISO Pass with good results Floor heating Yes Effect of castor chair EN 425 Suitable	FACTS		Slip resistance	DIN 51130	R10	75 DS
Range Luxury Tiles propensity Collection Dry Back Wood Collection Chemical resistance EN ISO Pass with good results 26987 Floor heating Yes Effect of castor chair EN 425 Suitable	Design	Wood design	Statical electrical	FN 1815	< 2 kV (antistatic)	7
Floor heating Yes 26987 Effect of castor chair EN 425 Suitable	Range	Luxury Tiles		214 1015	· Z KV (diffustatio)	
Floor heating Yes Effect of castor chair EN 425 Suitable	Collection	Dry Back Wood Collection	Chemical resistance		Pass with good results	*
Thickness 2.5 mm Effect of castor chair EN 425 Suitable	Floor heating	Yes		26987		
	Thickness	2.5 mm	Effect of castor chair	EN 425	Suitable	6

Descriptions & Imagery

PRODUCT DETAILS

Autiala Nicosalaau

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





Good

FACTS TECHNICAL PROPERTIES

Installation method

Glue-down


Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





Other products in this collection

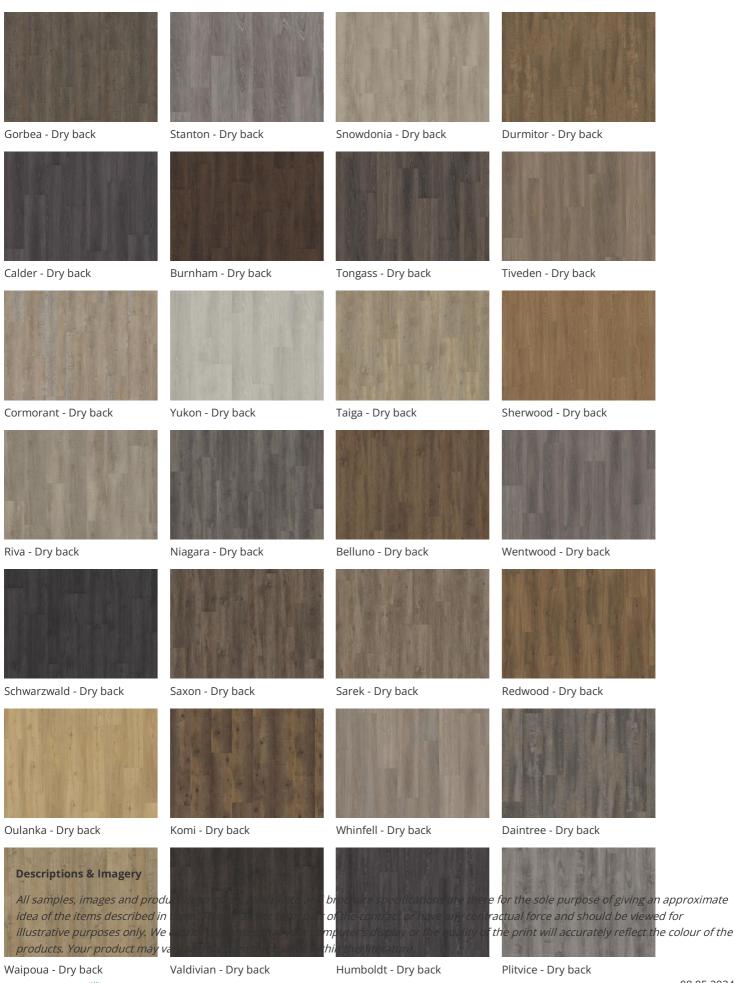







Triglav - Dry back