



KEBNEKAISE DBS 457-030 - 0.3 MM

2.5 mm

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.3 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

TECHNICAL PROPERTIES

Effect of castor chair

Resistance to bacteria and fungi

EN 425

Suitable

Good

PRODUCT DETAILS			TECHNICAL PROPERTIES			
Article Number LTDBS3005	-457-3	Reaction To Fire	EN13501-1	Bfl-s1	B _{III} s1	
Dimensions 457 x 457 n	nm	Thermal Resistance R-Value		0.011 (m2K/W)	- F	
Weight per Package 21 kg		Dimensional stability	EN ISO	< 0.1 %	K Z)	
Area per Package 5 m ²			23999			
Area per pallet 240.5 m ²		Colour fastness	EN ISO 105- B02	≥ 6	5 7	
Construction Dry back		Slip resistance	EN 13893	DS (>0.3)	7.5a	
FACTS		Slip resistance	DIN 51130	R10		
Design Stone desig	gn	Statical electrical	EN 1815	< 2 kV (antistatic)	F	
Range Luxury Tiles	S	propensity	EN 1013			
Collection Dry Back St	one Collection	Chemical resistance	EN ISO	Pass with good results	FO	
Floor heating Yes			26987			

Descriptions & Imagery

PRODUCT DETAILS

Thickness

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





FACTS TECHNICAL PROPERTIES

Installation method

Glue-down


Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





Other products in this collection

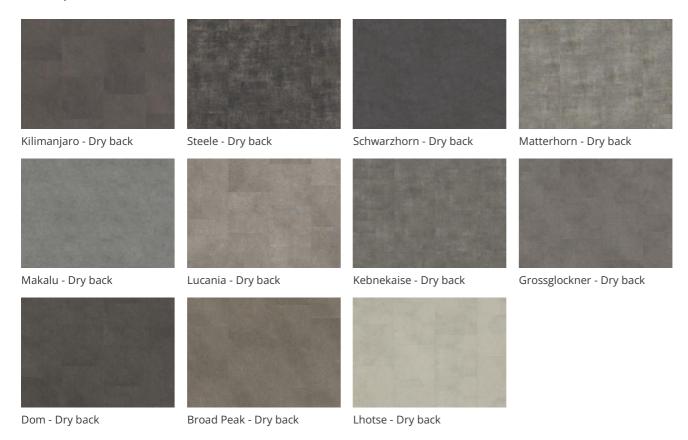

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



