



# DENALI DBS 457-030 - 0.3 MM

1/8"

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.55 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS		TECHNICAL PROPERTIES	TECHNICAL PROPERTIES			
Article Number	LTDBS3017-457-3	Reaction To Fire	EN13501-1	Bfl-s1	B <sub>H</sub> ·s1	
Dimensions	18 x 18 "	Thermal Resistance R-Value		0.011 (m2K/W)	-	
Weight per Package	46.3 lbs	Dimensional stability	EN ISO	< 0.1 %	K N K N	
Area per Package	53.8 sqft		23999			
Area per pallet	2588.7 sqft	Colour fastness	EN ISO 105-	≥ 6	<b>3</b>	
Construction	Dry back		B02			
Construction	Dry back	Slip resistance	EN 13893	DS (>0.3)	- F	
FACTS		Slip resistance	DIN 51130	R10	25	
Design	Stone design	Statical electrical propensity	EN 1815	< 2 kV (antistatic)	F	
Range	Luxury Tiles					
Collection	Dry Back Stone Collection - Special Order	Chemical resistance	EN ISO 26987	Pass with good results	<b>\(\in\)</b>	
Floor heating	Yes	Resistance to bacteria and fungi		Good		

### **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



Thickness



FACTS TECHNICAL PROPERTIES

Installation method

Glue-Down


## **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





# Other products in this collection

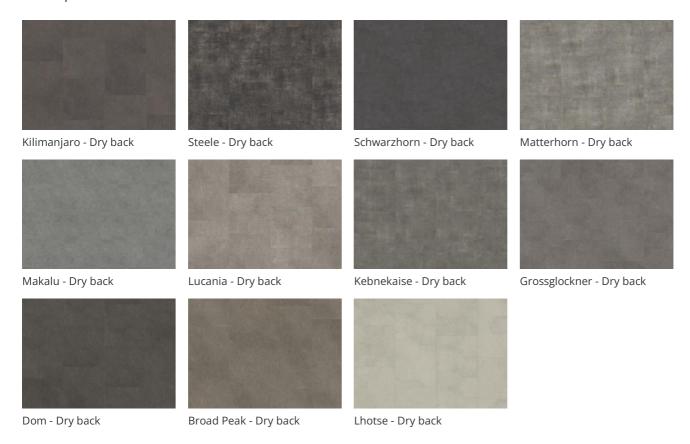

### **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



