

WHINFELL DBW 229-030 - 0.3 MM

DIN 51130

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.3 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS			TECHNICAL PROPERTIES		
Product type / Construction	Luxury Vinyl Tiles and Planks / Dry Back LVT		Statical electrical	EN 1815	< 2 kV (antistatic)
Article Number / EAN Code	LTDBW2004-229-3 / 7393969113939		propensity		
Design	Plank		Chemical resistance	EN ISO 26987	Pass with good results
Width x Length x Thickness	229 x 1219 x 2.5 mm		Effect of castor chair	EN 425	Suitable
Weight per package	16 kg		Resistance to bacteria and		Good
Area per package / per	3.9 m ² / 265.2 m ²		fungi		
pallet			SION CO.		
Installation method	Glue-down Yes		M1> M1> CONTACT OF CONTACT OF C		
Floor heating					
Wear leayer thickness	0.3 mm				
TECHNICAL PROPERTIES					
Reaction To Fire	EN13501-1	Bfl-s1	_		
Thermal Resistance R-Value	0.011 (m2K/W)				
Dimensional stability	EN ISO 23999	< 0.1 %			
Colour fastness	EN ISO 105-B02	≥ 6			
Slip resistance	EN 13893	DS (>0.3)			


Descriptions & Imagery

Slip resistance

www.kahrs.com | [©]Kährs 2025-08-15

R10

Other products in this collection

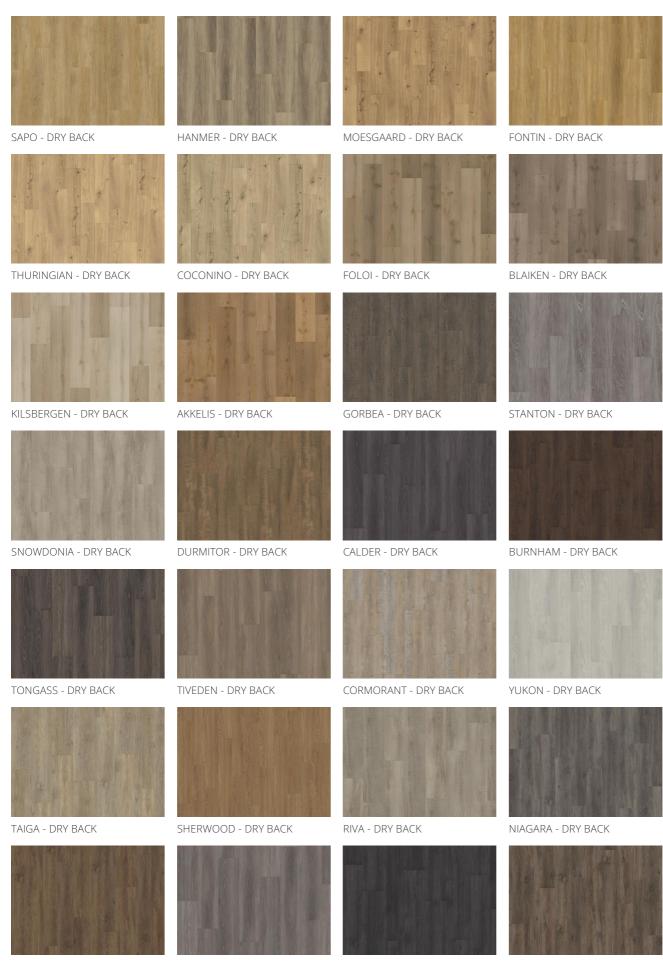

BELLUNO - DRY BACK

WENTWOOD - DRY BACK

SCHWARZWALD - DRY BACK

SAXON - DRY BACK






REDWOOD - DRY BACK

DAINTREE - DRY BACK





KOMI - DRY BACK



VALDIVIAN - DRY BACK



SAREK - DRY BACK



HUMBOLDT - DRY BACK

PLITVICE - DRY BACK

