

## OULANKA DBW 229-030 - 0.3 MM

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.3 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

| PRODUCT DETAILS                    |                          | TECHNICAL PROPERTIES             |                    |                        |             |
|------------------------------------|--------------------------|----------------------------------|--------------------|------------------------|-------------|
| Article Number                     | LTDBW2110-229-3          | <b>Reaction To Fire</b>          | EN13501-1          | Bfl-s1                 | Birst       |
| Dimensions                         | 229 x 1219 mm            | Thermal Resistance R-Value       |                    | 0.011 (m2K/W)          | (****       |
| Weight per Package<br>Construction | 16 kg<br>Dry back        | Dimensional stability            | EN ISO<br>23999    | < 0.1 %                | N<br>N<br>N |
| FACTS                              | ,                        | Colour fastness                  | EN ISO 105-<br>B02 | ≥ 6                    | 57          |
| Design                             | Wood design              | Slip resistance                  | EN 13893           | DS (>0.3)              | The second  |
| Range                              | Luxury Tiles             | Slip resistance                  | DIN 51130          | R10                    | Ser.        |
| Collection                         | Dry Back Wood Collection | Statical electrical              | EN 1815            | < 2 kV (antistatic)    | Ŧ           |
| Floor heating                      | Yes                      | propensity                       |                    | 2 (a                   |             |
| Thickness                          | 2.5 mm                   | Chemical resistance              | EN ISO             | Pass with good results |             |
| Installation method                | Glue-down                |                                  | 26987              |                        |             |
|                                    |                          | Effect of castor chair           | EN 425             | Suitable               | 6           |
|                                    |                          | Resistance to bacteria and fungi |                    | Good                   |             |

## **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

## Other products in this collection



Gorbea - Dry back




Calder - Dry back



Cormorant - Dry back





Schwarzwald - Dry back



Oulanka - Dry back



Stanton - Dry back



Burnham - Dry back

Yukon - Dry back

Niagara - Dry back



Snowdonia - Dry back



Tongass - Dry back



Taiga - Dry back



Belluno - Dry back







Durmitor - Dry back



Tiveden - Dry back



Sherwood - Dry back



Wentwood - Dry back








Waipoua - Dry back

Valdivian - Dry back

Humboldt - Dry back

Plitvice - Dry back

24.04.2024 AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

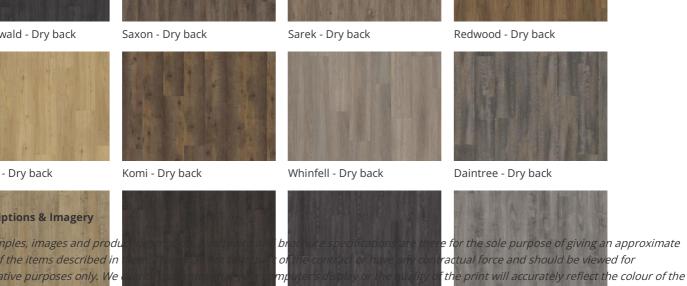



Triglav - Dry back