



OAK STUDIO CD OILED

Oak CD is a colorful oak floor with both color variations and knots.

PRODUCT DETAILS		TECHNICAL PROPERTIES		
Product type / Construction	Wood Floors / 2-layer parquet	Moisture content	EN13183	7%±2%
Article Number / EAN Code	111PCDEKF0KH050 / 7393969045896	Minimun Mean Density		>500 kg/m³
Design / Wood Species	Herringbone / Oak	kg/m³		
Surface treatment /	Oil / Natural	Reaction To Fire	EN13501-1	Cfl-s1
Natural/Stained		Formaldehyde Emission	EN717-1	E1
Width x Length x Thickness	70 x 490 x 11 mm	Content PCP	CEN/TR14823	≤ 5 ppm
Weight per package / per	13.3 kg / 6.33 kg	Breaking Strength N/mm ²	EN1533	NPD
m2		Thermal Conductivity	EN12664	0,14 W/mK
Area per package / per	2.06 m ² / 123.6 m ²	Thermal Resistance R-Value	2	.08 (m2K/W)
pallet		Biological Durability	EN350-2	Class 1
Grading	Lively	CARB2		Compliant
Joint	Tongue & Groove	Slip resistance	CEN/TS15676	NPD
Installation method	Glue-down			
Floor heating	Yes			
Wear leayer material /	Hardwood / 3.5 mm			
thickness				
Resandable	2 times			
Core material	Pine			
Hardness (Brinell) value /	3,7 / 2.2 - 5.9			
range				
Warranty	30 years			

DETAILED DESCRIPTION

Naturally occuring wood colour variations allowed, from light to dark brown.


The product includes large sound and black knots. Knots may vary in size and numbers.

Oil: This floor should be oiled immediately after installation.

Colour change: Some muting of colour variation to medium, straw brown.

Packages may contain start and stop boards.

Other products in this collection

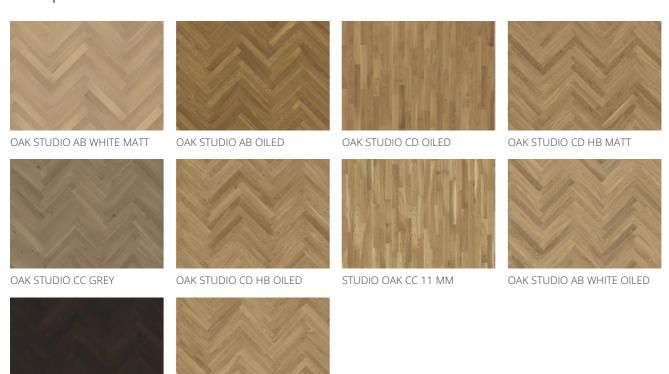

OAK STUDIO AB MATT