



## OAK STUDIO CD OILED

Oak CD is a colorful oak floor with both color variations and knots.

PRODUCT DETAILS		TECHNICAL PROPERTIES		
Product type / Construction	Wood Floors / 2-layer parquet	Moisture content	EN13183	7%±2%
Article Number / EAN Code	111PCDEKF0KH050 / 7393969045896	Minimun Mean Density		>500 kg/m³
Design / Wood Species	Herringbone / Oak	kg/m³		
Surface treatment /	Oil / Natural	Reaction To Fire	EN13501-1	Cfl-s1
Natural/Stained		Formaldehyde Emission	EN717-1	E1
Width x Length x Thickness	70 x 490 x 11 mm	Content PCP	CEN/TR14823	≤ 5 ppm
Weight per package / per	13.3 kg / 6.33 kg	Breaking Strength N/mm <sup>2</sup>	EN1533	NPD
m2		Thermal Conductivity	EN12664	0,14 W/mK
Area per package / per	2.06 m <sup>2</sup> / 123.6 m <sup>2</sup>	Thermal Resistance R-Value		.08 (m2K/W)
pallet		Biological Durability	EN350-2	Class 1
Grading	Lively	CARB2		Compliant
Joint	Tongue & Groove	Slip resistance	CEN/TS15676	NPD
Installation method	Glue-down			
Floor heating	Yes			
Wear leayer material /	Hardwood / 3.5 mm			
thickness		<u></u>		
Resandable	2 times			
Core material	Pine			
Hardness (Brinell) value /	3,7 / 2.2 - 5.9			
range				

## **DETAILED DESCRIPTION**

Warranty

Naturally occuring wood colour variations allowed, from light to dark brown.

30 years


The product includes large sound and black knots. Knots may vary in size and numbers.

Oil: This floor should be oiled immediately after installation.

Colour change: Some muting of colour variation to medium, straw brown.

Packages may contain start and stop boards.

## Other products in this collection

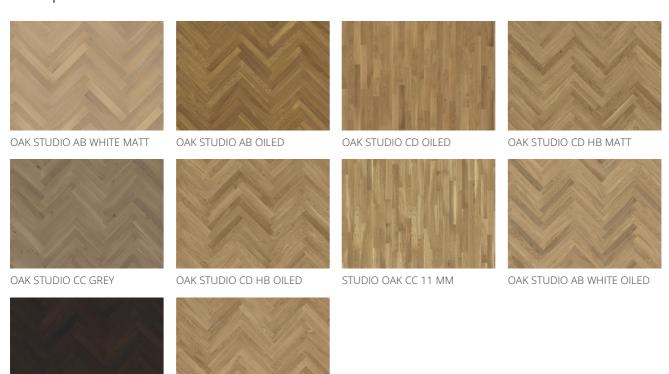

OAK STUDIO AB MATT