



# XPRESSION HAZEL

#### PRODUCT DETAILS

## TECHNICAL PROPERTIES

101513	Reaction To Fire	EN13501-1	Cfl-s1	
7 x 48 "	Thermal Resistance R-Value		0.009 (m2K/W)	(0) P
35.3 lbs	Residual indentation	EN ISO	< 0.05 mm	
46.3 sqft		24343-1		
3262.5 sqft	Dimensional stability	EN ISO 23999	< 0.1 %	K N
Dry back Xpression flooring	Colour fastness	EN ISO 105- B02	≥ 6	<b>\$</b>
Wood design	Slip resistance	EN 13893	DS (>0.3)	
Luxury Tiles	Slip resistance	DIN 51130	R9	
Xpression PVC-FREE Dry Back Collection - Special Order	Statical electrical propensity	EN 1815	< 2 kV (antistatic)	7
Yes	Resistance to bacteria and fungi		Good	
1/8"				
	7 x 48 "  35.3 lbs  46.3 sqft  3262.5 sqft  Dry back Xpression flooring  Wood design  Luxury Tiles  Xpression PVC-FREE Dry Back Collection - Special Order  Yes	7 x 48 "  35.3 lbs  46.3 sqft  Dimensional stability  Colour fastness  Wood design  Luxury Tiles  Xpression PVC-FREE Dry Back Collection - Special Order  Yes  Thermal Resistance R-N  Residual indentation  Colour fastness  Slip resistance  Slip resistance  Statical electrical propensity  Resistance to bacteria and the propensity	7 x 48 "  Thermal Resistance R-Value  35.3 lbs  Residual indentation 24343-1  3262.5 sqft  Dimensional stability 23999  Colour fastness EN ISO 23999  Colour fastness EN ISO 105-802  Wood design  Luxury Tiles  Slip resistance EN 13893  Xpression PVC-FREE Dry Back Collection - Special Order  Yes  Thermal Resistance R-Value  EN ISO 24343-1  Colour fastness EN ISO 105-802  EN 13893  Slip resistance DIN 51130  Statical electrical propensity  Resistance to bacteria and fungi	Thermal Resistance R-Value  0.009 (m2K/W)  Residual indentation 46.3 sqft  Dimensional stability 23999  Colour fastness EN ISO 23999  Colour fastness EN ISO 0.05 mm  EN ISO 24343-1  EN ISO 23999  Colour fastness EN ISO 105- ≥ 6 B02  Slip resistance EN 13893 DS (>0.3)  Slip resistance DIN 51130 R9  Xpression PVC-FREE Dry Back Collection - Special Order  Yes  Resistance to bacteria and fungi Good

### **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.







FACTS TECHNICAL PROPERTIES

Installation method

Glue-Down

### **Descriptions & Imagery**


All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.







## Other products in this collection

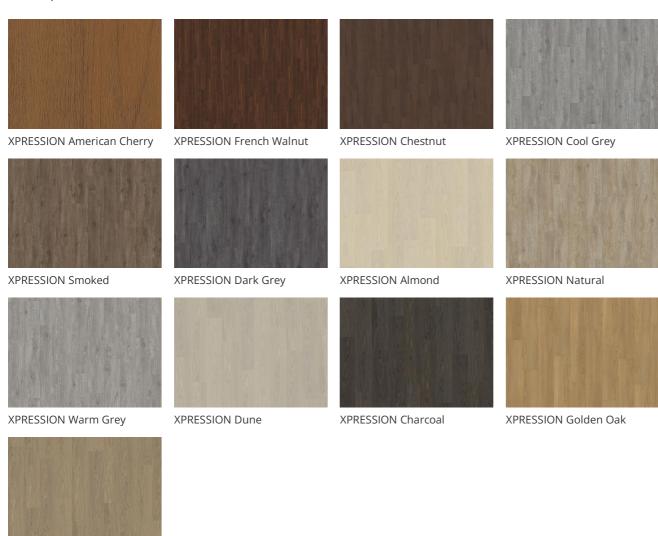

XPRESSION Hazel

#### **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





