



XPRESSION SMOKED

PRODUCT DETAILS

TECHNICAL I	PROPERTIES

101504	Reaction To Fire	EN13501-1	Cfl-s1			
7 x 48 " Thermal Resistance R-Va		alue	0.009 (m2K/W)	(p		
35.3 lbs	Residual indentation	EN ISO	< 0.05 mm			
46.3 sqft		24343-1				
3262.5 sqft	Dimensional stability	EN ISO 23999	< 0.1 %	K N K N		
Dry back Xpression flooring	Colour fastness	EN ISO 105- B02	≥ 6			
Wood design	Slip resistance	EN 13893	DS (>0.3)			
Luxury Tiles	Slip resistance	DIN 51130	R9			
Xpression PVC-FREE Dry Back Collection - Special Order	Statical electrical propensity	EN 1815	< 2 kV (antistatic)	F		
Yes	Resistance to bacteria	Resistance to bacteria and fungi		Good		
1/8"						
	7 x 48 " 35.3 lbs 46.3 sqft 3262.5 sqft Dry back Xpression flooring Wood design Luxury Tiles Xpression PVC-FREE Dry Back Collection - Special Order Yes	7 x 48 " 35.3 lbs 46.3 sqft Dimensional stability Colour fastness Wood design Luxury Tiles Xpression PVC-FREE Dry Back Collection - Special Order Yes Thermal Resistance R-N Residual indentation Colour fastness Slip resistance Slip resistance Statical electrical propensity Resistance to bacteria and the propensity	7 x 48 "Thermal Resistance R-Value35.3 lbsResidual indentation 24343-1EN ISO 24343-13262.5 sqftDimensional stability 23999EN ISO 023999Dry back Xpression flooringColour fastnessEN ISO 105-802Wood designSlip resistanceEN 13893Luxury TilesSlip resistanceDIN 51130Xpression PVC-FREE Dry Back Collection - Special OrderStatical electrical propensityEN 1815YesResistance to bacteria and fungi	Thermal Resistance R-Value 0.009 (m2K/W) Residual indentation 46.3 sqft Dimensional stability 23999 Colour fastness EN ISO 23999 Colour fastness EN ISO 23999 EN ISO 23999 Colour fastness EN ISO 105- 26 802 EN ISO 23999 Colour fastness EN ISO 105- 26 802 EN ISO 105- 26 802 Slip resistance EN 13893 DS (>0.3) EN ISO 2015- 26 802 EN I3893 DS (>0.3) Slip resistance EN 13893 EN ISO 105- 2 6 802 EN I3893 EN ISO 105- 2 6 802 EN I3893 EN I389		

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.







FACTS TECHNICAL PROPERTIES

Installation method

Glue-Down

Descriptions & Imagery


All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.







Other products in this collection

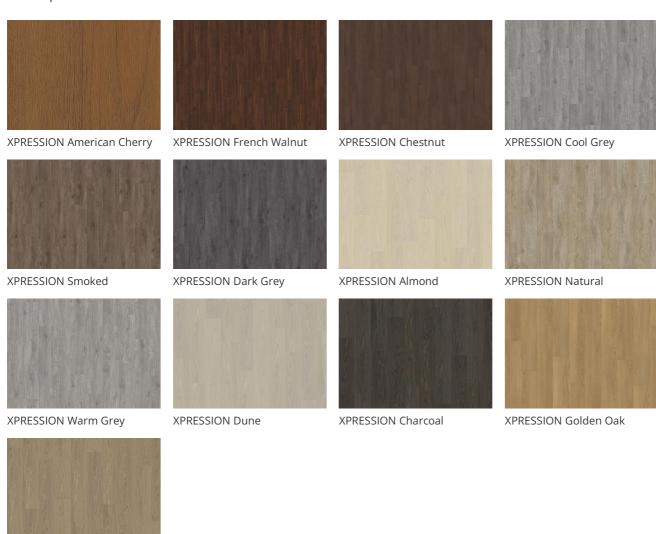

XPRESSION Hazel

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.





