



OAK FAWN MATTE

DDODLICT DETAILS

This plank oak floor from the Canvas Collection features a warm, white-pigmented matt lacquer. The result is a beautifully neutral floor with the appearance of freshly cut wood. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. The matt lacquer eliminates glare while protecting the wood from daily wear. Four-sided micro-bevelling at the edges ensures a classic full plank look and feel.

PRODUCT DETAILS		PRODUCT DETAILS	
Product type / Construction	Wood Floors / 3-layer parquet	LRV / LRV Std1	
Article Number / EAN Code	13103AEK1KKW185 / 7393969048040	Warranty	
Design / Wood Species	1-strip / Oak	— TECHNICAL PROPERTIES	
Surface treatment /	Matt lacquer / Stained	Moisture content Minimun Mean Density kg/m³	
Natural/Stained			
Design features	Microbevelled 4-sided, Brushed		
Width x Length x Thickness	127 x 1860 x 13 mm		
Weight per package / per	12.687 kg / 7.68 kg	Reaction To Fire	
m2		Formaldehyde Emission	
Area per package / per	1.652 m ² / 104.076 m ²	Content PCP	
	1.032 111 7 104.070 111	Breaking Strength N/mm ²	
pallet		Thermal Conductivity	
Grading	Variation	Thermal Resistance R-Value	
Joint	Woodloc® 5G	Biological Durability	
Installation method	Floating, Glue-down	— CARB2	
Floor heating	Yes		
Wear leayer material /	Hardwood / 3 mm	Slip resistance	
thickness		TSCA TITLE VI STILLE VI ST	
Resandable	2-3 times	CARB P2	
Core material	Pine/Spruce lamella	Compliant O StS 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	
Hardness (Brinell) value /	3,7 / 2.2 - 5.9		
range			

PRODI	ICT	DETAIL	ς
INODO	<i>_</i>		

LRV / LRV Std1	44 / 3.4	
Warranty	25 years	
- TECHNICAL PROPERTIES		
Moisture content	EN13183	7%±2%
Minimun Mean Density		>500 kg/m³
- kg/m³		
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm ²	EN1533	NPD









CEN/TS15676

EN12664

EN350-2

DETAILED DESCRIPTION

All naturally occurring wood colour variations allowed, from light to dark. Small sized knots in limited numbers allowed.

Colour change: Stained product - noticeable color change over time.

Packages may contain start and stop boards.

0,08 W/mK

Class 1


NPD

Compliant

.15 (m2K/W)

Other products in this collection

OAK TUFT MATTE

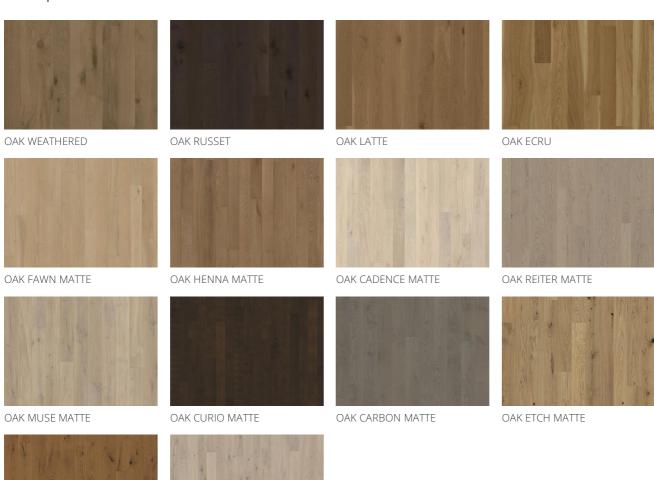

OAK MOSTRA MATTE