



# **ASH VAILA**

PRODUCT DETAILS

The naturally occurring colour variations found in this 3-strip ash floor from the Tres Collection range from clotted cream to sandy beach hues. The silk lacquer finish gives the floor a polished appearance and brings out the natural character of the timber. The even finish protects the wood from daily wear, without adding artificial shine.

#### Product type / Construction Wood Flooring / 3-layer parquet 133NACAK50KW240 / 7393969034210 Article Number / EAN Code Design / Wood Species 3-strip / Ash Surface treatment / Silk lacquer / Natural Natural/Stained Width x Length x Thickness 200 x 2423 x 13 mm Weight per package / per 24.5 kg / 7.21 kg Area per package / per 3.4 m<sup>2</sup> / 170 m<sup>2</sup> pallet Woodloc® 5G Joint Installation method Floating, Glue-down

Wear leayer material /	Hardwood / 2.6 mm
thickness	
Resandable	2-3 times
Core material	Pine/Spruce lamella
Brinell value / range	4,0 / 2.8 - 6.2
Warranty	20 years

Yes

### TECHNICAL PROPERTIES

Moisture content	EN13183	7%±2%
Minimun Mean Density		>500 kg/m³
kg/m³		
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm <sup>2</sup>	EN1533	NPD
Thermal Conductivity	EN12664	0,14 W/mK
Thermal Resistance R-Value		.09 (m2K/W)
Biological Durability	EN350-2	Class 1
CARB2		Compliant
Slip resistance	CEN/TS15676	NPD

















#### **TECHNICAL PROPERTIES**

### DETAILED DESCRIPTION

Floor heating

All naturally occuring wood colour variations allowed, from light to dark brown.

The product includes medium sound and black knots. Knots will vary in size and numbers.


Colour change: Pale cream darkens to straw tan.

Packages may contain start and stop boards.

## Other products in this collection

Oak Pima

Oak Erve

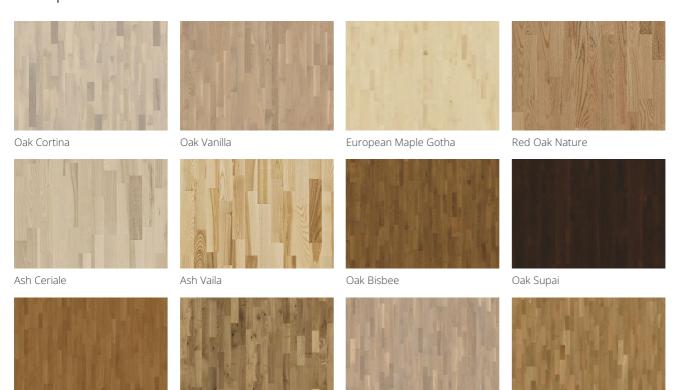

Oak Abetone

Oak Lecco