




## STUDIO OAK CD 9 MM

Oak CD, a 2-layer construction, is a rustik colourful floor with an oiled finish. Offered with a variety of surface treatments and patterns.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	091PCDEK09KE050	Wood Species	Oak	Moisture	EN13183	7%±2%
EAN Code	7393969042208	Design	1-strip	content		
Surface treatment	Matt lacquer	Grading	Lively	Minimun Mean Density kg/m³ >500 kg/m³		
Dimensions	70 x 490 mm	Range	Kährs Master	Reaction To Fire	EN13501-1	Cfl-s1
Weight per Package	18.3 kg	Collection	Studio Collection	Formaldehyde	EN717-1	E1
Area per Package	2.6 m <sup>2</sup>	Resandable	2 times	Emission		
Package info	Packages may contain start and stop boards.	Natural/Stained	Natural	Content PCP	CEN/TR14823	3 ≤ 5 ppm
		Brinell Value	3,7	Breaking	EN1533	NPD
DETAIL DESCRIPTION		Joint	Tongue & Groove	Strength N/mm²		
from light to dark brown. The product includes large sound and black knots. Knots may vary in size and numbers.  COLOUR CHANGE		Floor heating	Yes	Thermal	EN12664	0,14 W/mK
		Warranty	30 years	Conductivity		
		Wear-layer material	Hardwood	Thermal Resistance R-Value		.06 (m2K/W)
		Wear Layer Thickness	3 mm	Biological  Durability	EN350-2	Class 1
		Thickness	9 mm	CARB2		Compliant
Some muting of colour variation to medium, straw brown.		Installation method	Glue-down	Slipperiness CEN/TS15676		

## Other products in this collection

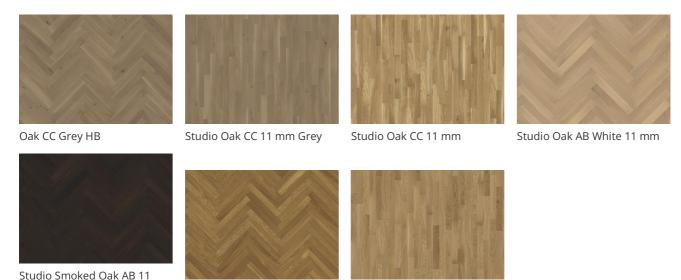

Studio Oak AB 11 mm

## **Descriptions & Imagery**

mm

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

Studio Oak CD 11 mm