



OAK GENTIAN

Oak Gentian has a light white wash with a slight grey nuance harmonizing the darker wood grains, knots and cracks with the overall stained wood colour. This makes a statement of a stylish and modern design while still retaining the warmth of the oak. The matt lacquered surface is brushed to bring out the texture of the wood grain even more, letting the pattern created by nature come to life.

	PRODUCT DETAILS		
Wood Floors / 3-layer parquet	Hardness (Brinell) value /	3,7 / 2.2 - 5.9	
131249220 / 7393969302531	range		
1-strip / Oak	LRV / LRV Std1 / LRV Std2	41 / 4.7 / 9.4	
Matt lacquer / Stained	Warranty	20 years	
	TECHNICAL DROBERTIES	:	
Microbevelled 4-sided, Brushed			7%±2%
187 x 2266 x 13 mm		LIVIDIOD	>500 kg/m ³
24 kg / 7.2 kg	,		≥500 kg/III
		EN12501 1	Dfl-s1
3.39 m ² / 152.55 m ²			E1
			≤ 5 ppm
Dynamic			NPD
Woodloc® 5G			0,11W/mK
Floating, Glue-down			Class 1
Yes		EIN35U-2	
Hardwood / 2.6 mm		CENTE 1 F C 7 C	Compliant
	Slip resistance	CEN/15150/6	NPD
2-3 times	SHEECHS CANELING STREET		
Pine/Spruce lamella	A+		
Spruce			
	131249220 / 7393969302531 1-strip / Oak Matt lacquer / Stained Microbevelled 4-sided, Brushed 187 x 2266 x 13 mm 24 kg / 7.2 kg 3.39 m² / 152.55 m² Dynamic Woodloc® 5G Floating, Glue-down Yes Hardwood / 2.6 mm 2-3 times Pine/Spruce lamella	Wood Floors / 3-layer parquet 131249220 / 7393969302531 1-strip / Oak Matt lacquer / Stained Microbevelled 4-sided, Brushed 187 x 2266 x 13 mm 24 kg / 7.2 kg Dynamic Dynamic Woodloc® 5G Floating, Glue-down Yes Hardwood / 2.6 mm Pine/Spruce lamella Hardness (Brinell) value / range LRV / LRV Std1 / LRV Std2 Warranty TECHNICAL PROPERTIES Moisture content Minimun Mean Density kg/m³ Reaction To Fire Formaldehyde Emission Content PCP Breaking Strength N/mm² Thermal Conductivity Biological Durability CARB2 Slip resistance	Wood Floors / 3-layer parquetHardness (Brinell) value / range3,7 / 2.2 - 5.9131249220 / 7393969302531range1-strip / OakLRV / LRV Std1 / LRV Std241 / 4.7 / 9.4Matt lacquer / StainedWarranty20 yearsTECHNICAL PROPERTIESMicrobevelled 4-sided, BrushedMoisture contentEN13183187 x 2266 x 13 mmMinimun Mean Density kg/m³24 kg / 7.2 kgkg/m³Reaction To FireEN13501-1Formaldehyde EmissionEN717-1Content PCPCEN/TR14823Breaking Strength N/mm²EN1533Thermal ConductivityEN12664Biological DurabilityEN350-2CARB2Slip resistanceCEN/TS15676

DETAILED DESCRIPTION

All naturally occurring wood colour variations allowed, from light to dark brown. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.


Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items

Other products in this collection

OAK BUTTERCUP

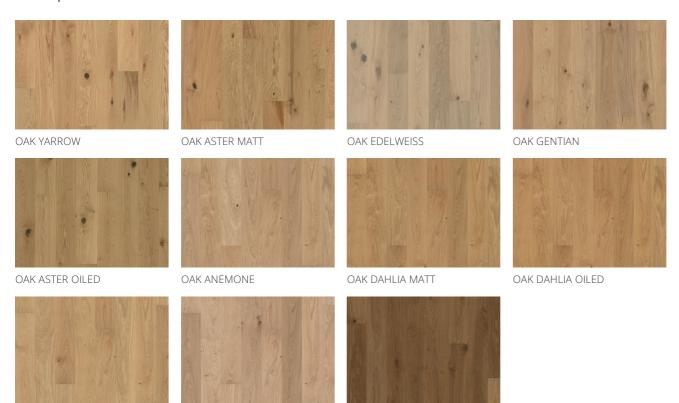

OAK ALP ROSE

OAK MARGUERITE