



OAK YARROW

A light stain is used to give Oak Yarrow its modern, slightly muted look, reminiscent of freshly cut oak timber. The oiled surface, brushed to soften the cracks and knots, allows each board to demonstrate the natural wood grain of the material while still retaining the subtlety of this floor – in both its visual and tactile impression.

| PRODUCT DETAILS | | Р |
|-----------------------------|---|------------------|
| Product type / Construction | Wood Floors / 3-layer parquet | Н |
| Article Number / EAN Code | 131245200 / 7393969302487 | ra |
| Design / Wood Species | 1-strip / Oak | LF |
| Surface treatment / | Oil / Stained | W |
| Natural/Stained | | TI |
| Design features | Microbevelled 4-sided, Brushed | |
| Width x Length x Thickness | 187 x 2000 x 13 mm | |
| Weight per package / per | 21 kg / 7.19 kg | |
| m2 | | R |
| Area per package / per | 2.99 m ² / 134.55 m ² | <u>K</u> |
| pallet | | |
| Grading | Dynamic | —— B |
| Joint | Woodloc® 5G | —— <u>В</u> Т |
| Installation method | Floating, Glue-down | <u> </u> T |
| Floor heating | Yes | _ |
| Wear leayer material / | Hardwood / 2.6 mm | —— <u>B</u> |
| thickness | | <u>C</u> |
| Resandable | 2-3 times | <u>S</u> |
| Core material | Pine/Spruce lamella | |
| Backside material | Spruce | |

| PRODI | ICT | DETAIL | ς |
|-------|----------|--------|---|
| INODO | <i>_</i> | | |

| Hardness (Brinell) value / | 3,7 / 2.2 - 5.9 | |
|-------------------------------------|-----------------|-------------|
| range | | |
| LRV / LRV Std1 / LRV Std2 | 36 / 4.9 / 9.8 | |
| Warranty | 20 years | |
| TECHNICAL PROPERTIES | | |
| - Moisture content | EN13183 | 7%±2% |
| Minimun Mean Density | | >500 kg/m³ |
| kg/m³ | | |
| Reaction To Fire | EN13501-1 | Dfl-s1 |
| Formaldehyde Emission | EN717-1 | E1 |
| Content PCP | CEN/TR14823 | ≤ 5 ppm |
| Breaking Strength N/mm ² | EN1533 | NPD |
| Thermal Conductivity | EN12664 | 0,11W/mK |
| - Thermal Resistance R-Value | | .09 (m2K/W) |
| - Biological Durability | EN350-2 | Class 1 |
| CARB2 | | Compliant |
| Slip resistance | CEN/TS15676 | NPD |





DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.


Oil: This floor should be oiled immediately after installation.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Other products in this collection

OAK BUTTERCUP

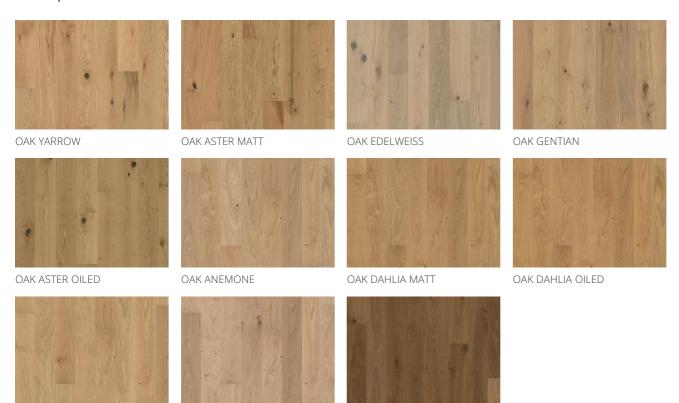

OAK ALP ROSE

OAK MARGUERITE