



OAK ASTER MATT 200

In Oak Aster the natural oak is left to shine in all its own glory with no staining, allowing the warm colour of the oak to penetrate the lacquered surface uninhibited. Each board is carefully brushed, accentuating the natural wood grain while softening the texture, knots and cracks. Any contrast in colour are purely natural, letting the raw material speak for itself. Oak Aster is also available in an oiled version.

	PRODUCT DETAILS		
Wood Floors / 3-layer parquet	Hardness (Brinell) value /	3,7 / 2.2 - 5.9	
131248200 / 7393969303071	range		
Plank / Oak	LRV / LRV Std1 / LRV Std2	40 / 7.7 / 15.4	
Matt lacquer / Natural	Warranty	20 years	
	TECHNICAL PROPERTIES	:	
Microbevelled 4-sided, Brushed			7%±2%
187 x 2000 x 13 mm		LINISTOS	>500 kg/m ³
21 kg / 7.02 kg	•		>500 kg/III
	-	EN13501_1	Dfl-s1
2.99 m ² / 134.55 m ²			E1
			≤ 5 ppm
Dynamic			NPD
Woodloc® 5G			0,11W/mK
Floating, Glue-down			
Yes		EN35U-2	Class 1
Hardwood / 2.6 mm		GEN (FO.) 5 CT (Compliant
	Slip resistance	CEN/15156/6	NPD
2-3 times	(Merochat oval the bligator)		
Pine/Spruce	A+		
Spruce			
	131248200 / 7393969303071 Plank / Oak Matt lacquer / Natural Microbevelled 4-sided, Brushed 187 x 2000 x 13 mm 21 kg / 7.02 kg 2.99 m² / 134.55 m² Dynamic Woodloc® 5G Floating, Glue-down Yes Hardwood / 2.6 mm 2-3 times Pine/Spruce	Wood Floors / 3-layer parquet 131248200 / 7393969303071 Plank / Oak Matt lacquer / Natural Microbevelled 4-sided, Brushed 187 x 2000 x 13 mm 21 kg / 7.02 kg Plank / O2 kg 2.99 m² / 134.55 m² Dynamic Woodloc® 5G Floating, Glue-down Yes Hardwood / 2.6 mm Hardness (Brinell) value / range LRV / LRV Std1 / LRV Std2 Warranty TECHNICAL PROPERTIES Moisture content Minimun Mean Density kg/m³ Reaction To Fire Formaldehyde Emission Content PCP Breaking Strength N/mm² Thermal Conductivity Biological Durability CARB2 Slip resistance	Wood Floors / 3-layer parquetHardness (Brinell) value / range3,7 / 2.2 - 5.9131248200 / 7393969303071rangePlank / OakLRV / LRV Std1 / LRV Std240 / 7.7 / 15.4Matt lacquer / NaturalWarranty20 yearsMicrobevelled 4-sided, BrushedMoisture contentEN13183187 x 2000 x 13 mmMinimun Mean Density kg/m³21 kg / 7.02 kgkg/m³Reaction To FireEN13501-1Formaldehyde EmissionEN717-1Content PCPCEN/TR14823Breaking Strength N/mm²EN1533Thermal ConductivityEN12664Biological DurabilityEN350-2CARB2Slip resistanceCEN/TS15676

DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.

Colour change: Some muting of colour variation to medium, straw brown.


Packages may contain start and stop boards.

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items

Other products in this collection

OAK LUPINE

OAK LAVENDER

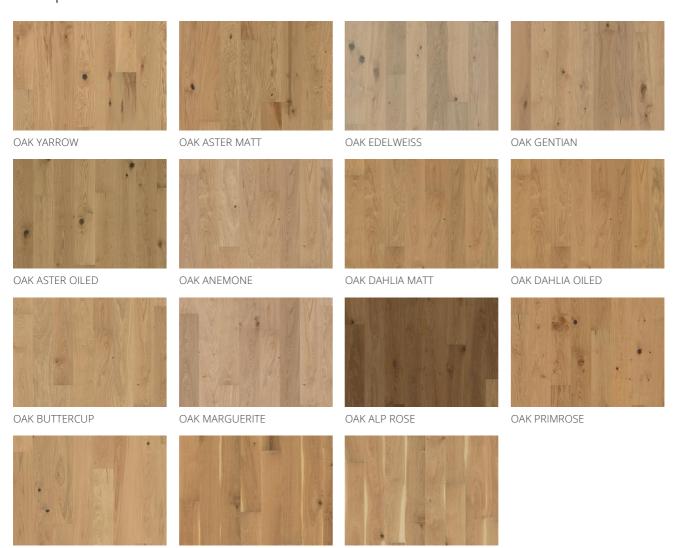

OAK ZINNIA