



Grade 4-5

<0.15 mm

< 0.15 % (80 °C/6 h)

Bfl-s1

DS

MSR-A1

19 dB

EN 438-2

EN13501-1

EN ISO 23999

EN ISO 10140

EN 13893

EN16094


## FUSION CLICK PLANK 6 MM

Let Fusion Plank ignite your senses, merging timeless beauty with contemporary flair, creating spaces that resonate with harmony and style. Fusion offers a soft, pale blonde colour with undertones of honey and in combination with the calm, natural wood look creates a flooring design which will give any space a luxurious feel and impression.

PRODUCT DETAILS			TECHNICAL PROPERTIES
Product type / Construction	Luxury Vinyl Tiles and Planks / Click SPC LVT		Resistance against staining
Article Number / EAN Code	LTCLW2502-241 / 7393969303729		Reaction To Fire
Design	Plank		Residual indentation EN
Width x Length x Thickness	241.3 x 1815 x 6 mm		ISO 24343-1
Weight per package	18.01 kg		Dimensional stability
Area per package / per	1.752 m <sup>2</sup> / 119.136 m <sup>2</sup>		Slip resistance
pallet			Scratch resistance
Joint	Uniclic®		Impact sound reduction
Installation method	Floating		_
Floor heating	Yes		
Wear leayer thickness	0.7 mm		
LRV / LRV Std1 / LRV Std2	39 / 2.6 / 5.2		
Warranty	30 years		
TECHNICAL PROPERTIES			_
Product specification		EN 16511	_
Effect of furniture leg	EN ISO 16581	No visible damage/Change	_
Impact resistance		>1800 mm	_

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items

## Other products in this collection

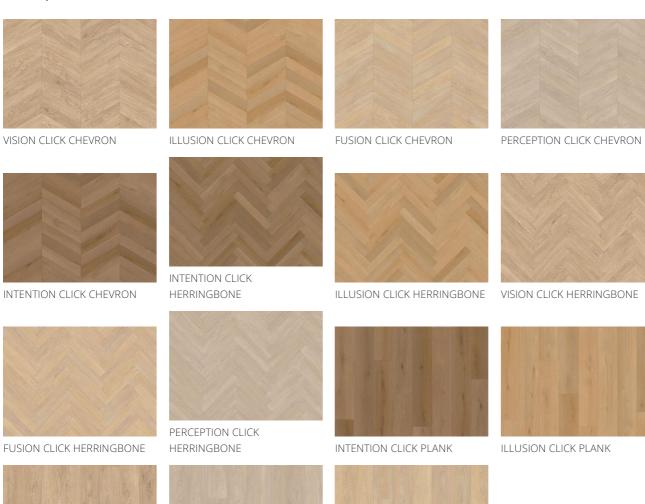

PERCEPTION CLICK PLANK



FUSION CLICK PLANK