



R10

Suitable

Good

< 2 kV (antistatic)

Pass with good results

BLAIKEN DRY BACK 0.55 MM

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.55 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

Product type / Construction	Luxury Vinyl Tiles and Planks / Dry Back LVT	
Article Number / EAN Code	LTDBW2303-229-5 / 7393969303125	
Design	Plank	
Width x Length x Thickness	229 x 1219 x 2.5 mm	
Weight per package	16 kg	
Area per package / per	3.9 m ² / 265.6 m ²	
pallet		
Installation method	Glue-down	
Floor heating	Yes	
Wear leayer thickness	0.55 mm	
Warranty	30 years	
TECHNICAL PROPERTIES		
Reaction To Fire	EN13501-1	Bfl-s1
	·	



fungi



TECHNICAL PROPERTIES

DIN 51130

EN ISO 26987

EN 1815

EN 425

Slip resistance

propensity

Statical electrical

Chemical resistance

Effect of castor chair

Resistance to bacteria and


Warranty	30 years	
TECHNICAL PROPERTIES		
Reaction To Fire	EN13501-1	Bfl-s1
Thermal Resistance R-Value		0.011 (m2K/W)
Dimensional stability	EN ISO 23999	< 0.1 %
Colour fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893	DS (>0.3)

PRODUCT DETAILS

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items

Other products in this collection



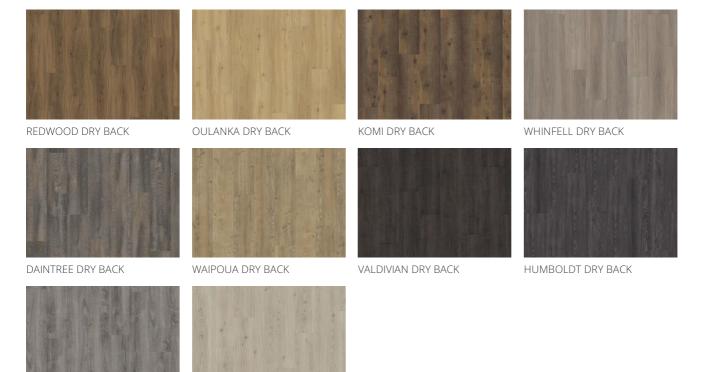

PLITVICE DRY BACK

TRIGLAV DRY BACK