



# OAK HERRINGBONE CD VINTAGE SMOKED

ak Herringbone CD Vintage Smoked is a premium 2-layer European oak parquet with natural colour variations and knots. Each bundle includes both left and right elements for glue-down herringbone installation. The generous dimensions are highlighted by four-sided micro-bevelling, while the lightly smoked surface, with saw marks, is brushed and treated with tinted oil to achieve a raw, patinated look.

#### TECHNICAL DEODEDTIES DDODLICT DETAIL C

	TECHNICAL PROPERTIES		
Wood Flooring / 2-layer parquet	Moisture content	EN13183	7%±2%
111PCDEKFAKE600 / 7393969305266	Minimun Mean Density		>500 kg/m³
Herringbone / Oak	kg/m <sup>3</sup>		
Oil / Stained	Reaction To Fire	EN13501-1	Cfl-s1
	Formaldehyde Emission	EN717-1	E1
Brushed, Saw marks, Smoked, Microbevelled	Content PCP	CEN/TR14823	≤ 5 x 10-6n
4-sided	Breaking Strength N/mm <sup>2</sup>	EN1533	NPD
120 x 600 x 11 mm	Biological Durability	EN350-2	Class 1
18 kg / 7.81 kg	CARB2		Compliant
	Slip resistance	CEN/TS15676	NPD
2.304 m <sup>2</sup> / 96.768 m <sup>2</sup>			
	SMISSONI DANI LAR PITÉREUP		
Lively	MADO		
Tongue & Groove	_		
Glue-down	_		
Yes	<del>_</del>		
	111PCDEKFAKE600 / 7393969305266  Herringbone / Oak  Oil / Stained  Brushed, Saw marks, Smoked, Microbevelled 4-sided  120 x 600 x 11 mm  18 kg / 7.81 kg  2.304 m² / 96.768 m²  Lively  Tongue & Groove  Glue-down	Wood Flooring / 2-layer parquet  111PCDEKFAKE600 / 7393969305266  Herringbone / Oak  Oil / Stained  Brushed, Saw marks, Smoked, Microbevelled 4-sided  120 x 600 x 11 mm  Biological Durability  18 kg / 7.81 kg  CARB2  Slip resistance  2.304 m² / 96.768 m²  Lively  Tongue & Groove  Glue-down  Moisture content  Minimun Mean Density  kg/m³  Reaction To Fire  Formaldehyde Emission  Content PCP  Breaking Strength N/mm²  CARB2  Slip resistance	Wood Flooring / 2-layer parquetMoisture contentEN13183111PCDEKFAKE600 / 7393969305266Minimun Mean Density kg/m³EN13501-1Herringbone / OakReaction To FireEN13501-1Oil / StainedFormaldehyde EmissionEN717-1Brushed, Saw marks, Smoked, Microbevelled 4-sidedContent PCPCEN/TR14823120 x 600 x 11 mmBiological DurabilityEN350-218 kg / 7.81 kgCARB22.304 m² / 96.768 m²Slip resistanceCEN/TS15676LivelyContent PCPCEN/TS15676

## DETAILED DESCRIPTION

Hardness (Brinell) value /

Wear leayer material /

thickness Core material

range Warranty

Naturally occuring wood colour variations allowed, from light to dark brown. The product includes large sound and black knots. Knots may vary in size and numbers.

Oil: This floor should be oiled immediately after installation.

Hardwood / 3.5 mm

Birch Plywood

3,7 / 2.2 - 5.9

30 years

Colour change: The smoked finish accentuates the natural colour variations, creating a stronger contrast between light and dark tones initially. Over time, the colour variations will soften, resulting in a more uniform overall appearance. The oiled surface will develop a natural patina.


Packages may contain start and stop boards.

#### **Descriptions & Imagery**

### Other products in this collection

GREY

WHITE

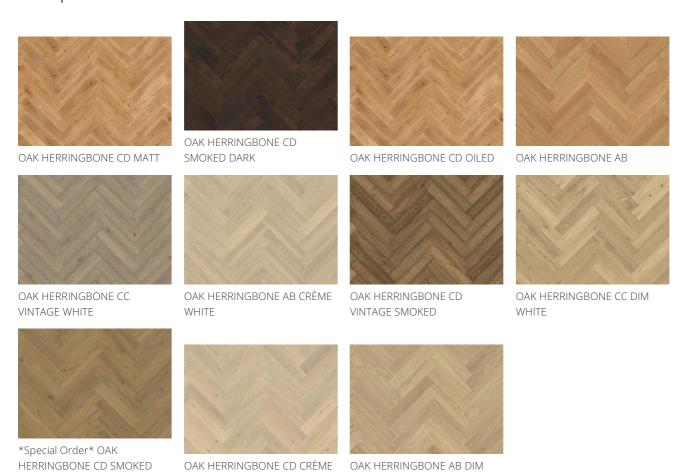

WHITE