



OAK DAHLIA MATT

Oak Dahlia Matt allows the natural oak to radiate in its purest form, free from staining, with the warm tones of the wood penetrating the lacquered surface seamlessly. The boards are carefully brushed to highlight the wood's grain, gently softening its texture. The natural variations in color remain, celebrating the authenticity of the raw material.

	PRODUCT DETAILS		
Wood Floors / 3-layer parquet	Hardness (Brinell) value /	3,7 / 2.2 - 5.9	
131258200 / 7393969305341	range		
1-strip / Oak	LRV / LRV Std1 / LRV Std2	38 / 4.1 / 8.2	
Matt lacquer / Natural	Warranty	20 years	
	TECHNICAL PROPERTIES	•	
Microbevelled 4-sided, Brushed	-		7%±2%
187 x 2000 x 13 mm		LIVISIOS	>500 kg/m ³
21 kg / 7.2 kg	,		>300 Kg/III
		EN13501_1	Dfl-s1
2.99 m ² / 134.55 m ²			F1
			≤ 5 ppm
Calm			NPD
Woodloc® 5G	· · · · · · · · · · · · · · · · · · ·		0,11W/mK
Floating, Glue-down			Class 1
Yes		EN33U-Z	
Hardwood / 2.6 mm		CENTELECTE	Compliant NPD
	slip resistance	CEIN/1313070	NPD
2-3 times	SHEIOHI DANI CAR BYREEZY		
Pine/Spruce lamella	A+		
Spruce			
	131258200 / 7393969305341 1-strip / Oak Matt lacquer / Natural Microbevelled 4-sided, Brushed 187 x 2000 x 13 mm 21 kg / 7.2 kg 2.99 m² / 134.55 m² Calm Woodloc® 5G Floating, Glue-down Yes Hardwood / 2.6 mm 2-3 times Pine/Spruce lamella	Wood Floors / 3-layer parquet 131258200 / 7393969305341 1-strip / Oak Matt lacquer / Natural Microbevelled 4-sided, Brushed 187 x 2000 x 13 mm 21 kg / 7.2 kg 2.99 m² / 134.55 m² Calm Woodloc® 5G Floating, Glue-down Yes Hardwood / 2.6 mm Hardmess (Brinell) value / range LRV / LRV Std1 / LRV Std2 Warranty TECHNICAL PROPERTIES Moisture content Minimun Mean Density kg/m³ Reaction To Fire Formaldehyde Emission Content PCP Breaking Strength N/mm² Thermal Conductivity Biological Durability CARB2 Slip resistance	Hardness (Brinell) value / 3,7 / 2.2 - 5.9 131258200 / 7393969305341 1-strip / Oak Matt lacquer / Natural Microbevelled 4-sided, Brushed 187 x 2000 x 13 mm 21 kg / 7.2 kg Minimun Mean Density kg/m³ Reaction To Fire Formaldehyde Emission EN717-1 Content PCP CEN/TR14823 Breaking Strength N/mm² EN1533 Thermal Conductivity Yes Hardwood / 2.6 mm Hardness (Brinell) value / 3,7 / 2.2 - 5.9 Tange 1,7 / 2.2 - 5.9 Tange Rearchin / LRV Std2

DETAILED DESCRIPTION

Calm appearance with moderate color variations and few knots. The product includes small and medium sized knots. Knot holes and small cracks are repaired with filler.


Colour change: Some muting of color variation to medium, straw brown.

Packages may contain start and stop boards.

Other products in this collection

OAK LUPINE

OAK LAVENDER

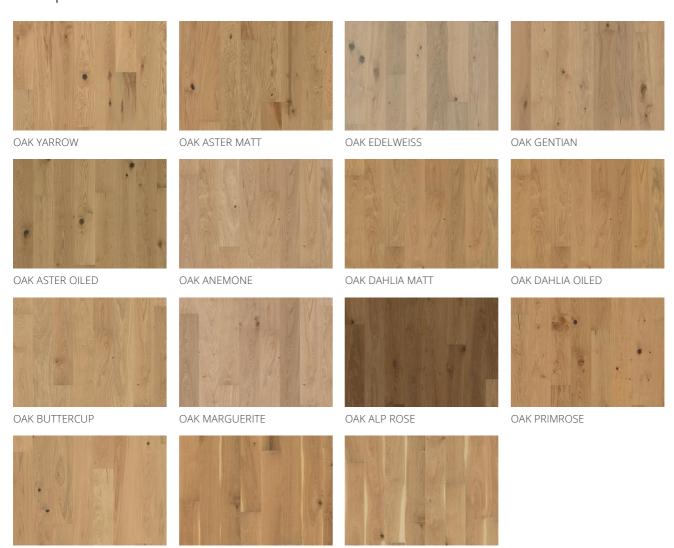

OAK ZINNIA