



KEBNEKAISE DBS 457 - 0.7 MM

Our Luxury Tiles Dry Back collection is available in a wide selection of wood and stone designs. The wood designs range from traditional to elegant herringbone and rustic, while the stone designs span from classic stone to concrete. It also includes exciting patterns. The Dry Back floors, with a 0.7 mm wear layer, are based on virgin vinyl and constructed in five different layers, topped by a ceramic coating. The result is extremely resilient and strong floors resistant to both scratching and water, which means that these floors are suitable even for spaces exposed to heavy traffic. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS		TECHNICAL PROPERTIES				
Article Number	LTDBS3005-457	Reaction To Fire	EN13501-1	Bfl-s1	Byrst	
Dimensions	457 x 457 mm	Thermal Resistance R-\	Thermal Resistance R-Value			
Weight per Package	21 kg	Dimensional stability	EN ISO	< 0.1 %	K A)	
Area per Package	5 m²		23999			
Area per pallet	240.5 m ²	Colour fastness	EN ISO 105- B02	≥ 6	3	
Construction	Dry back	Slip resistance	EN 13893	DS (>0.3)	100 mg	
FACTS		Slip resistance	DIN 51130	R10	75 DS	
Design	Stone design	Statical electrical	EN 1815	< 2 kV (antistatic)	F	
Range	Luxury Tiles	propensity				
Collection	Dry Back Stone Collection	Chemical resistance	EN ISO	Pass with good results	₹	
Floor heating	Yes		26987			
Thickness	2.5 mm	Effect of castor chair	EN 425	Suitable	ଟ	
		Resistance to bacteria	Resistance to bacteria and fungi		Good	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.









FACTS TECHNICAL PROPERTIES

Installation method

Glue-down

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.












Other products in this collection

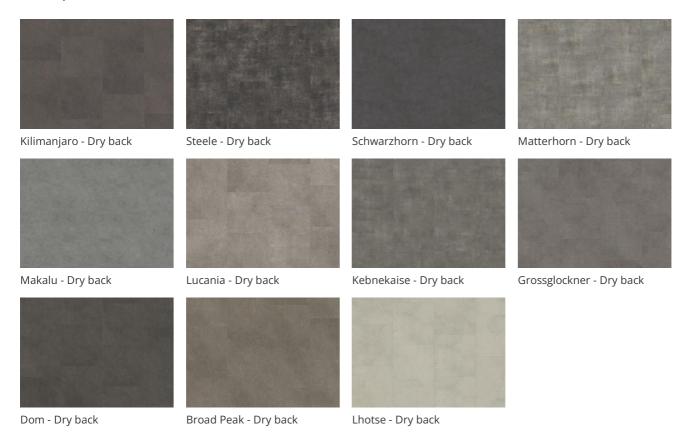

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.









