



## OAK CARBON MATTE

The smoky brown nuances of this single-strip oak floor from the Canvas Collection range from light to dark, and are stippled with a striking variety of knots for a rustic expression. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. The matt lacquer finish eliminates glare while protecting the wood from daily wear. Four-sided bevelling at the edges ensures a classic full plank look and feel.

PRODUCT DETAILS		PRODUCT DETAILS	
Product type / Construction	Wood Floors / 3-layer parquet	LRV / LRV Std1	
Article Number / EAN Code	13106AEK1RKW185 / 7393969044035	Warranty	
Design / Wood Species	Plank / Oak	— TECHNICAL PROPI	
Surface treatment /	Matt lacquer / Stained	Moisture content	
Natural/Stained			
Design features	Microbevelled 4-sided, Brushed		
Width x Length x Thickness	127 x 1860 x 13 mm	Reaction To Fire	
Weight per package / per	12.687 kg / 7.68 kg	Formaldehyde Emiss	
m2			
Area per package / per	1.652 m <sup>2</sup> / 104.076 m <sup>2</sup>	Content PCP	
pallet		Breaking Strength N/	
Grading	Lively	Thermal Conductivity	
	Woodloc® 5G	—— Thermal Resistance F	
Joint		Biological Durability	
Installation method	Floating, Glue-down	CARB2	
Floor heating	Yes	Slip resistance	
Wear leayer material /	Hardwood / 3 mm	Jilp resistance	
thickness		TSCA TITLE VI	
Resandable	2-3 times	CARB P2	
Core material	Pine/Spruce	Compliant	
Hardness (Brinell) value /	3,7 / 2.2 - 5.9		
range			

	LICT	DETAIL	_
PROD	UCI	DETAIL	_S

Warranty	25 years	
— TECHNICAL PROPERTIES		_
Moisture content	EN13183	7%±2%
<ul> <li>Minimun Mean Density</li> <li>kg/m³</li> </ul>		>500 kg/m³
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm <sup>2</sup>	EN1533	NPD
Thermal Conductivity	EN12664	0,08 W/mK
Thermal Resistance R-Value	!	.15 (m2K/W)

16 / 1.9









CEN/TS15676

EN350-2

## **DETAILED DESCRIPTION**

All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.

Colour change: Stained product - noticeable color change over time.

Packages may contain start and stop boards.


Class 1

NPD

Compliant

## Other products in this collection

OAK TUFT MATTE

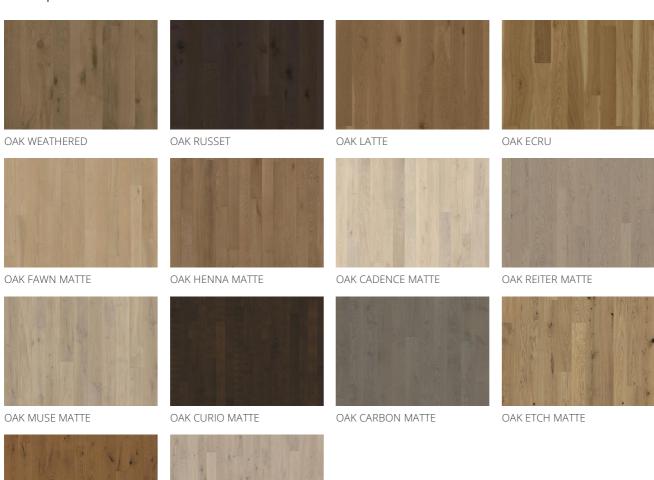

OAK MOSTRA MATTE