



OAK CURIO MATTE

The charcoal-brown hues found in this single-strip oak floor from the Canvas Collection range from dark to light. Natural variations in the timber, alongside mottled knots and cracks, give it a rustic expression. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. The matt lacquer finish eliminates glare while protecting the wood from daily wear. Four-sided bevelling at the edges ensures a classic full plank look and feel.

| PRODUCT DETAILS | | - 1 |
|-----------------------------|---|----------|
| Product type / Construction | Wood Floors / 3-layer parquet | |
| Article Number / EAN Code | 13106AEKA1KW185 / 7393969043915 | \ |
| Design / Wood Species | Plank / Oak | |
| Surface treatment / | Matt lacquer / Stained | |
| Natural/Stained | | - |
| Design features | Microbevelled 4-sided, Brushed | |
| Width x Length x Thickness | 127 x 1860 x 13 mm | |
| Weight per package / per | 12.687 kg / 7.68 kg | |
| m2 | | <u>:</u> |
| Area per package / per | 1.652 m ² / 104.076 m ² | - |
| pallet | | |
| Grading | Lively | |
| Joint | Woodloc® 5G | |
| Installation method | Floating, Glue-down, Nail-down | |
| Floor heating | Yes | |
| Wear leayer material / | Hardwood / 3 mm | |
| thickness | | |
| Resandable | 2-3 times | |
| Core material | Pine/Spruce | |
| Hardness (Brinell) value / | 3,7 / 2.2 - 5.9 | |
| range | | |

| PROI | DUCT | DETAIL: | S |
|------|------|---------|---|
|------|------|---------|---|

| LRV / LRV Std1 | 8 / 0.7 | |
|----------------------------|-------------|-------------|
| Warranty | 25 years | |
| TECHNICAL PROPERTIES | | |
| Moisture content | EN13183 | 7%±2% |
| Minimun Mean Density | | >500 kg/m³ |
| kg/m³ | | |
| Reaction To Fire | EN13501-1 | Dfl-s1 |
| Formaldehyde Emission | EN717-1 | E1 |
| Content PCP | CEN/TR14823 | ≤ 5 ppm |
| Breaking Strength N/mm² | EN1533 | NPD |
| Thermal Conductivity | EN12664 | 0,08 W/mK |
| Thermal Resistance R-Value | ? | .15 (m2K/W) |
| Biological Durability | EN350-2 | Class 1 |
| CARB2 | | Compliant |
| Slip resistance | CEN/TS15676 | NPD |









DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.


Colour change: Stained product - noticeable color change over time.

Packages may contain start and stop boards.

Descriptions & Imagery

Other products in this collection

OAK TUFT MATTE

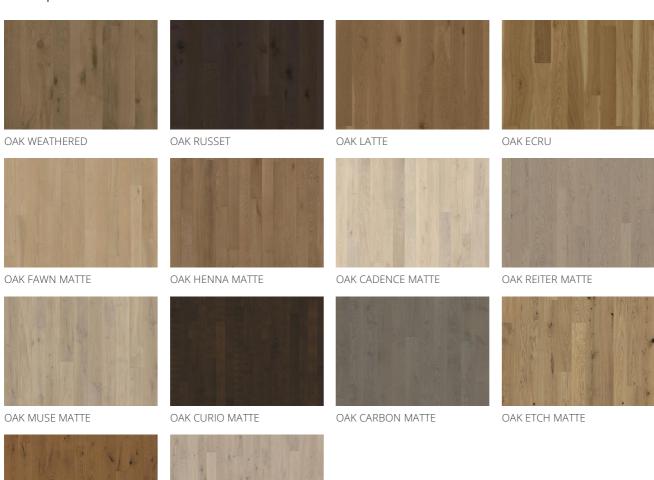

OAK MOSTRA MATTE