




## STUDIO OAK CD 11 MM

brown.

Oak CD is a colorful oak floor with both color variations and knots.

| PRODUCT DETAILS  |   | FACTS                |                   | TECHNICAL PROPERTIES                   |              |                        |
|--|---|----------------------|-------------------|--|--------------|------------------------|
| Article Number   | 111PCDEKF0KE050   | Wood Species         | Oak               | Moisture                               | EN13183      | 7%±2%                  |
| EAN Code   | 7393969042048   | Design               | Pattern           | content                                |              |                        |
| Surface treatment  | Oil<br>This floor should be oiled<br>immediately after<br>installation. | Grading              | Lively            | Minimun Mean Density kg/m <sup>3</sup> |              | >500 kg/m <sup>3</sup> |
|  |   | Range                | Kährs Master      | Reaction To<br>Fire                    | EN13501-1    | Cfl-s1                 |
|  |   | Collection           | Studio Collection | Formaldehyde                           | EN717-1      | E1                     |
| Dimensions   | 70 x 490 mm   | Resandable           | 2 times           | Emission                               |              |                        |
| Weight per Package   | 13.3 kg   | Natural/Stained      | Natural           | Content PCP                            | CEN/TR14823  | ≤ 5 ppm                |
| Area per Package   | 2.1 m <sup>2</sup>  | Brinell Value        | 3,7               | Breaking                               | EN1533       | NPD                    |
| Package info   | Packages may contain start and stop boards.                             | Joint                | Tongue & Groove   | Strength<br>N/mm²                      |              |                        |
|  |   | Floor heating        | Yes               | Thermal                                | EN12664      | 0,14 W/mK              |
| DETAIL DESCRIPTION   |   | Warranty             | 30 years          | Conductivity                           |              |                        |
| from light to dark brown. The product includes large sound and black knots. Knots may vary in size and numbers.  COLOUR CHANGE |   | Wear-layer material  | Hardwood          | Thermal Resistance R-Value             |              | .08 (m2K/W)            |
|  |   | Wear Layer Thickness | 4 mm              | Biological  Durability                 | EN350-2      | Class 1                |
|  |   | Core material        | Birch Plywood     | CARB2                                  |              | Compliant              |
|  |   | Thickness            | 11 mm             | Slipperiness                           | CEN/TS15676  | '                      |
|  |   | Installation method  | Glue-down         | Suppermess                             | CLIW 1313070 | INI D                  |
| Some muting of colour  | variation to medium, straw  |                      |                   |  |              |                        |

## Other products in this collection

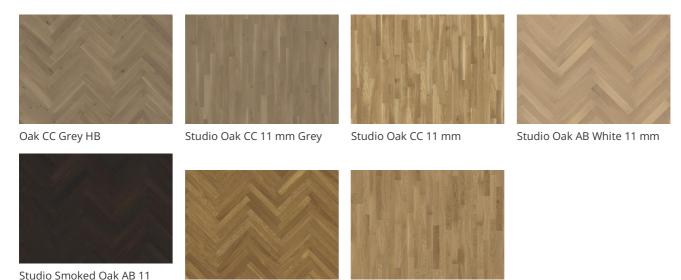

Studio Oak AB 11 mm

## **Descriptions & Imagery**

mm

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

Studio Oak CD 11 mm