



## OAK VIENNA

Oak Vienna is a floor with strips selected to provide a subdued, harmonious impression.

| PRODUCT DETAILS             |   |  |
|-----------------------------|---|--|
| Product type / Construction | Wood Flooring / 3-layer parquet           |  |
| Article Number / EAN Code   | 153N15EK50KW240 / 7393969015356           |  |
| Design / Wood Species       | 3-strip / Oak                             |  |
| Surface Treatment /         | Satin lacquer / Natural                   |  |
| Natural/Stained             |   |  |
| Width x Length x Thickness  | 200 x 2423 x 15 mm                        |  |
| Weight per package / per    | 23 kg / 7.93 kg                           |  |
| m2                          |   |  |
| Area per package / per      | 2.9 m <sup>2</sup> / 130.1 m <sup>2</sup> |  |
| pallet                      |   |  |
| Grading                     | Calm                                      |  |
| Joint                       | Woodloc® 5S                               |  |
| Installation method         | Floating, Glue-down                       |  |
| Floor heating               | Yes                                       |  |
| Wear leayer material /      | Hardwood / 3.5 mm                         |  |
| thickness                   |   |  |
| Resandable                  | 2-3 times                                 |  |
| Core material               | Pine/Spruce lamella                       |  |
| Hardness (Brinell) value /  | 3,7 / 2.2 - 5.9                           |  |
| range                       |   |  |
| Warranty                    | 30 years                                  |  |

## TECHNICAL PROPERTIES

| Moisture content           | EN13183     | 7%±2%       |
|----------------------------|-------------|-------------|
| Minimun Mean Density       |             | >500 kg/m³  |
| kg/m³                      |             |             |
| Reaction To Fire           | EN13501-1   | Dfl-s1      |
| Formaldehyde Emission      | EN717-1     | E1          |
| Content PCP                | CEN/TR14823 | ≤ 5 x 10-6n |
| Breaking Strength N/mm²    | EN1533      | NPD         |
| Thermal Resistance R-Value |             | .11 (m2K/W) |
| Biological Durability      | EN350-2     | Class 1     |
| CARB2                      |             | Compliant   |
| Slip resistance            | CEN/TS15676 | NPD         |









## DETAILED DESCRIPTION

Even colour with minor variations.


Small sized knots in limited numbers allowed.

**Colour change**: Some muting of colour variation to medium, straw brown.

Packages may contain start and stop boards.

## Other products in this collection

OAK SIENA MATT

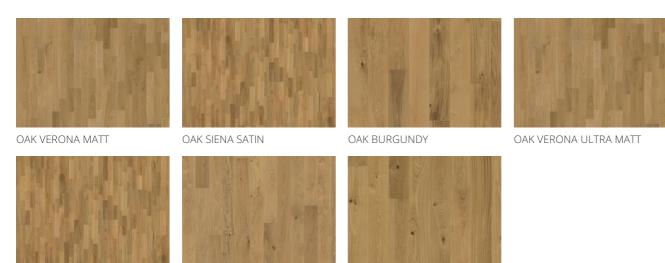

OAK CORNWALL

OAK HAMPSHIRE