




## OAK CADENCE

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	13103AEK1PKW185	Wood Species	Oak	Moisture	EN13183	7%±2%
EAN Code	7393969107358	Design	1-strip	content		
Surface treatment	Matt lacquer	Grading	Variation	Minimun Mean Density kg/m³ >500 kg/m³		
Dimensions	127 x 1860 mm	Range	Kährs Avanti	Reaction To Fire	EN13501-1	Dfl-s1
Weight per Package	12.687 kg	Collection	Canvas Collection	Formaldehyde Emission	EN717-1	E1
Area per Package	1.652 m²	Resandable	2-3 times			
Area per pallet	104.076 m <sup>2</sup>	Natural/Stained	Stained	Content PCP	CEN/TR14823	≤ 5 ppm
Package info	Packages may contain start and stop boards.	Brinell Value	3,7	Breaking Strength N/mm²	EN1533	NPD
		Joint	Woodloc® 5G			
DETAIL DESCRIPTION		Floor heating	Yes	Thermal	EN12664	0,08 W/mK
Even color with minor variations. Small to medium sized knots in limited numbers allowed.  COLOUR CHANGE		Warranty	25 years	Conductivity		
		Warranty US	25 years	Thermal Resista	Thermal Resistance R-Value	
		Wear-layer material	Hardwood	Biological  Durability	EN350-2	Class 1
Stained product - noticeable color change over time.		Wear Layer Thickness	3 mm	CARB2		Compliant
		Core material	Pine/Spruce lamella	Slipperiness CEN/TS1567		
		Thickness	13 mm	_ Suppermess — CEW 1916	CEN/1313070	570 141 5
		Installation method	Floating, Glue-down			
		Surface Colour	White			
		LRV	56			

## Other products in this collection

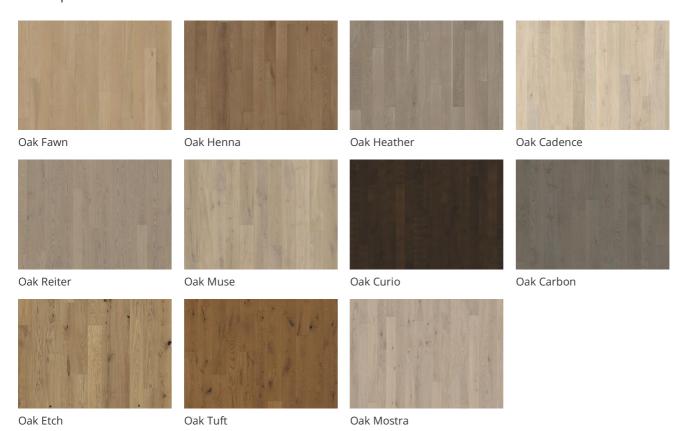

## **CERTIFICATES**









## **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.