



OULANKA DBW 229 - 0.7 MM

Special Order

Glue-Down

Yes

1/8"

Article Number	LTDBW2110-229	Reaction To Fire	EN13501-1	Bfl-s1	B _{II} ·s1
Dimensions	9 x 48 "	Thermal Resistance R-\	Thermal Resistance R-Value		- I
Area per pallet	2854.6 sqft	Dimensional stability	EN ISO	< 0.1 %	K Z
Construction	Dry back		23999		
FACTS		Colour fastness	EN ISO 105- B02	≥ 6	
Design	Wood design	Slip resistance	EN 13893	DS (>0.3)	
Range	Luxury Tiles	Slip resistance	DIN 51130	R10	25
Collection	Dry Back Wood Collection -	Chatian alastuian	EN 101E	< 2 \/ (antistatis)	

TECHNICAL PROPERTIES

Statical electrical

Chemical resistance

Resistance to bacteria and fungi

propensity

EN 1815

EN ISO

26987

< 2 kV (antistatic)

Good

Pass with good results

Descriptions & Imagery

PRODUCT DETAILS


Floor heating

Installation method

Thickness

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

Other products in this collection

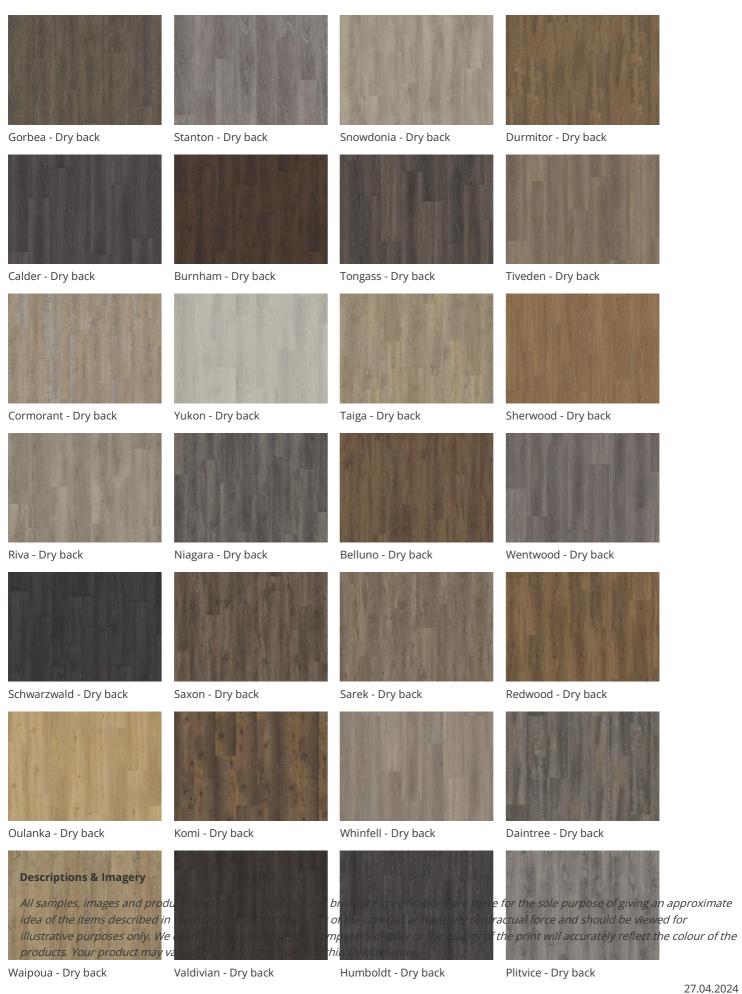



Triglav - Dry back