

# OAK STRAW

The naturally oiled finish on this rustic, single-strip oak floor from the Artisan Collection brings out the colour variations in the timber, which range from toasted cinnamon to burnt toffee hues. Each board is carefully brushed to bring out the character of the grain and highlight the natural texture of the wood. Four-sided bevelling at the edges ensures a classic, full plank look and feel. Hand-scraping enhances the worn appearance of the floor.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	151XCDEKFZKW195	Wood Species	Oak	Moisture	EN13183	7%±2%
EAN Code	7393969045292	Design	1-strip	content		
Surface treatment	Oil This floor should be oiled immediately after installation.	Grading	Dynamic	Minimun Mean Density kg/m <sup>3</sup> >500 kg/m <sup>3</sup>		
		Range	Kährs Original	Reaction To Fire	EN13501-1	Dfl-s1
		Collection	Artisan Collection	Formaldehyde Emission	EN717-1	E1
Design features	Bevelled 4-sided,	Resandable	2-3 times			
	Brushed, Handscraped	Natural/Stained	Natural	Content PCP	CEN/TR1482	3 ≤ 5 ppm
Dimensions	190 x 1900 mm	loint	Woodloc® 5G	Breaking	EN1533	NPD
Weight per Package	17 kg	Floor heating	Yes	— Strength N/mm <sup>2</sup>		
Area per Package	2.2 m <sup>2</sup>	Warranty	30 years	Thermal	EN12664	0,14 W/mK
Package info	Packages may contain start and stop boards.	Warranty US	25 years	Conductivity		-,
		Wear-layer material	Hardwood	Thermal Resistance R-Value		.11 (m2K/W)
DETAIL DESCRIPTION		Wear Layer Thickness	3.5 mm	Biological Durability	EN350-2	Class 1
All naturally occurring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes very large sound and black knots and cracks. Partly filled knots and cracks will be present in all sizes and numbers. Any flaking in the wood-surface is due to the hand-crafting		Core material	Pine/Spruce lamella	CARB2		Compliant
		Thickness	15 mm		CEN/TS15676	•
		Installation method	Glue-down, Floating	Slipperiness CEN	CEIN/15150/0	
		Surface Colour	Rustic natur			

Surface Colour

Rustic natur


### COLOUR CHANGE

Some muting of colour variation to medium, straw brown.

technique used on the surface to create the design

and is permitted without restriction.

## Other products in this collection

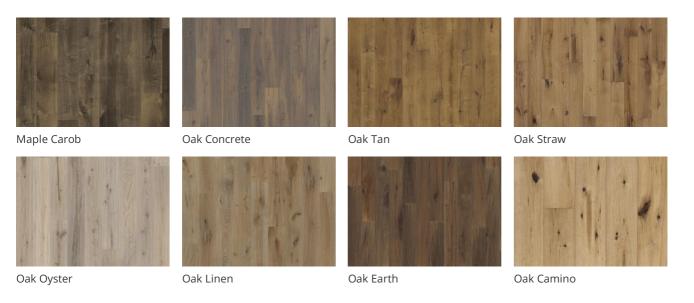

#### CERTIFICATES



## **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.