



OAK EDELWEISS

Oak Edelweiss creates a light, timeless impression in the interior, allowing the translucent, white-tinted oil to soften the contrast of knots and cracks in the floor. Each board is carefully brushed to bring out the character of the grain and highlight the texture of the wood.

PRODUCT DETAILS		PRODUCT DETAILS		
Product type / Construction	Wood Floors / 3-layer parquet	Hardness (Brinell) value /	3,7 / 2.2 - 5.9	
Article Number / EAN Code	131247220 / 7393969302517	range		
Design / Wood Species	1-strip / Oak	LRV / LRV Std1 / LRV Std2	41 / 4.7 / 9.4	
Surface treatment /	Oil / Stained	Warranty	20 years	
Natural/Stained		TECHNICAL PROPERTIES	:	
Design features	Microbevelled 4-sided, Brushed	—— Moisture content	FN13183	7%±2%
Width x Length x Thickness	187 x 2266 x 13 mm	— Minimun Mean Density	LIVIOO	>500 kg/m ³
Weight per package / per	24 kg / 7.2 kg	kg/m ³		>300 kg/111
m2		Reaction To Fire	EN13501-1	Dfl-s1
Area per package / per	3.39 m ² / 152.55 m ²	Formaldehyde Emission	FN717-1	E1
pallet		Content PCP	CEN/TR14823	≤ 5 ppm
Grading	Dynamic	Breaking Strength N/mm ²	EN1533	NPD
Joint	Woodloc® 5G	Thermal Conductivity	EN12664	0,11W/mK
Installation method	Floating, Glue-down	Biological Durability	EN350-2	Class 1
Floor heating	Yes		ENSSU-Z	
Wear leayer material /	Hardwood / 2.6 mm	CARB2	CENTE 1 F C 7 C	Compliant
thickness		Slip resistance	CEN/TS15676	NPD
Resandable	2-3 times	SHEICH DANILLE STREET		
Core material	Pine/Spruce lamella	A+		
Backside material	Spruce			

DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. The product includes large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.


Oil: This floor should be oiled immediately after installation.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Other products in this collection

OAK BUTTERCUP

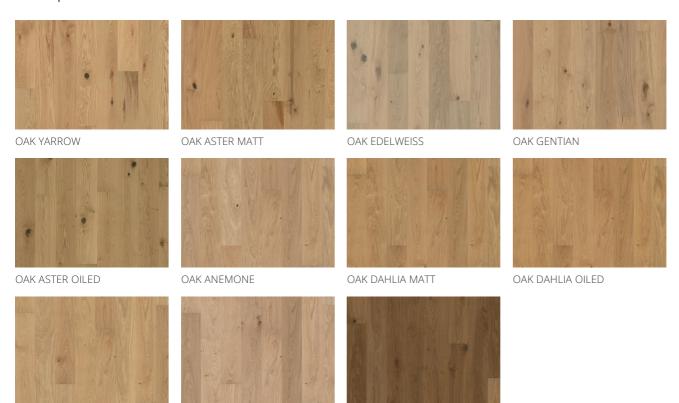

OAK ALP ROSE

OAK MARGUERITE