



OAK CORTINA

This light 3-strip floor has a clean look with modern contrasts between lighter and darker elements. The white stain overlays these contrasts, ensuring a unified base for any interior. Each board is carefully brushed to enhance the natural character of the grain and the ultra-matt lacquer finish effectively eliminates glare while protecting the floor from daily wear.

| PRODUCT DETAILS | | PRODUCT DETAILS | | |
|-----------------------------|---|------------------------------|------------------------------|------------------------|
| Product type / Construction | Wood Floors / 3-layer parquet | Hardness (Brinell) value / | 3,7 / 2.2 - 5.9 | |
| Article Number / EAN Code | 133N0BEKM4KW240 / 7393969302647 | range | | |
| Design / Wood Species | 3-strip / Oak | LRV / LRV Std1 / LRV Std2 | 54 / 5.8 / 11.6 | |
| Surface treatment / | Ultra matt lacquer / Stained | Warranty | 20 years | |
| Natural/Stained | | TECHNICAL PROPERTIES | : | |
| Design features | Brushed | Moisture content | EN13183 | 7%±2% |
| Width x Length x Thickness | 200 x 2423 x 13 mm | — Minimun Mean Density | ENTOTOS | >500 kg/m ³ |
| Weight per package / per | 24.5 kg / 7.21 kg | kg/m ³ | | - 300 kg/III |
| m2 | | — Reaction To Fire | EN13501-1 | Dfl-s1 |
| Area per package / per | 3.4 m ² / 170 m ² | Formaldehyde Emission | FN717-1 | E1 |
| pallet | | — Content PCP | CEN/TR14823 | ≤ 5 ppm |
| Grading | Lively | Breaking Strength N/mm² | EN1533 | NPD |
| Joint | Woodloc® 5G | — Thermal Conductivity | EN12664 | 0,11W/mK |
| Installation method | Floating, Glue-down | — Thermal Resistance R-Value | | .09 (m2K/W) |
| Floor heating | Yes | Biological Durability | EN350-2 | Class 1 |
| Wear leayer material / | Hardwood / 2.6 mm | CARB2 | LN330-2 | Compliant |
| thickness | | - | CEN/TS15676 | |
| Resandable | 2-3 times | Slip resistance | CEN/1515676 | NPD |
| Core material | Pine/Spruce/Alder | TSCA SESMANEC | (MESSONS DANS LINE RYTÉREUY) | floor |
| Backside material | Veneer | EPD) TITLE VI CARB P2 | PASTA PARE | score |

DETAILED DESCRIPTION


Significant wood colour variations allowed, from light to dark brown. Includes sapwood. Medium sound and small black knots may occur.

Ultra matt lacquer: The appearance of the matte surface may vary due to different light sources and angles.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.

Other products in this collection

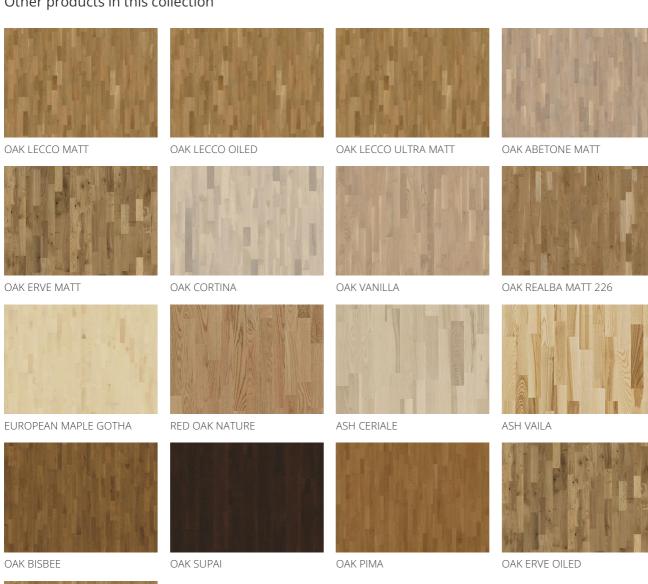



OAK LECCO SATIN